


Ideal for dormitories, offices, stores, and areas where effective cooling are required

product information

Motor	3-speed, 1/25 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9515)
	3-speed, 1/50 HP, 120V, 1 phase, permanently lubricated, permanent split capacitor (model 9530)
	2-speed, 1/100 HP, 120V, 1 phase, permanently lubricated (model 9525)
Controls	3-speed, rear mounted rotary switch (models 9515, 9530) 2-speed, rear mounted rotary switch (model 9525)
Power Cord	Black, 6', 3-conductor, SPT type (models 9515, 9530) White, 6', 3-conductor, SPT type (model 9525)
Construction	Impact resistant plastic with chemical resistant polypropylene blade
Compliances	UL, OSHA

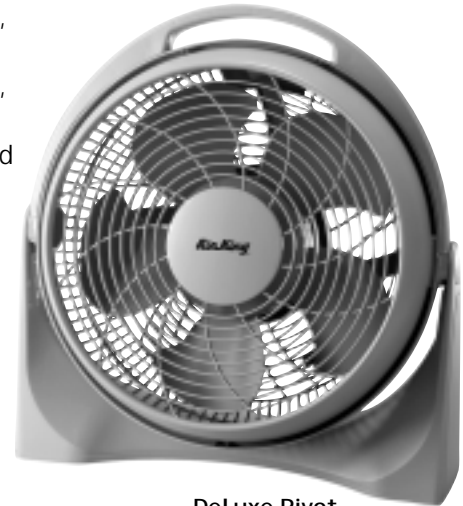

Deluxe Pivot
9515



Pivot
9525



High Performance Pivot
9530

specifications

Model	Description	Blade Size	Product Dimensions	Weight (lbs.)	Cube (feet)	List Price
9515	15" Deluxe Pivot Fan	15"	19 ³ / ₈ "L x 9 ¹ / ₂ "W x 20 ¹ / ₈ "H	8.8	2.40	\$57.00
9530	9" High Performance Pivot Fan	9"	13"L x 6 ¹ / ₂ "W x 13 ¹ / ₄ "H	4.4	.71	\$43.00
9525	9" Pivot Fan		14 ¹ / ₂ "L x 6"W x 13"H	4.1	.73	\$35.00

performance

Model	CFM			RPM			AMPS			WATTS			DB A		
	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW	HIGH	MED	LOW
9515	1700	1400	1070	1050	875	650	1.10	.75	.60	119	90	65	55	50	44
9530	700	610	520	2100	1800	1500	.50	.43	.37	58	51	45	54	50	46
9525	430	-	340	2449	-	1883	.57	-	.39	37	-	27	48	-	37

Performance ratings are conducted in accordance with AMCA standard 230-99. • Specifications are subject to change.