



SPECIFICATIONS
APF SERIES
 RANGE HOODS

ENERGY STAR® Professional Range Hood Series

• **Hood Dimensions**

Overall bottom projection - 24"
 Available heights (less Soffit) - 10" and 18"
 Available widths: 30" and 36"

• **Hood**

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• **Lighting**

Electronic Quick Start Ballast – Use 2 - Triple 4 pin PL lamps. Maximum 18 Watts each.

• **Ducting Options**

Vertical or Horizontal ducting through ducting transition





• **Filters**

Dishwasher safe, aluminum mesh grease filters (included).

• **Blower**

Blower description goes here.

PERFORMANCE: High - 600 CFM @ 5.5 Sones, HVI Certified
 Medium - 500 CFM @ 4.5 Sones, HVI Certified
 Low (Normal Operating Speed) - 300 CFM @ 1.5 Sones, HVI Certified

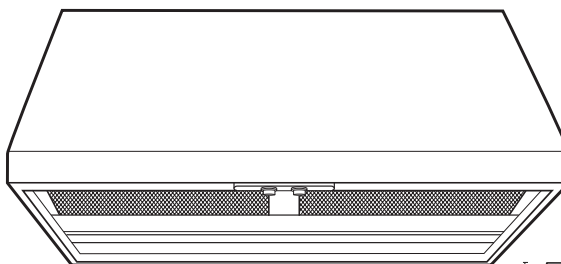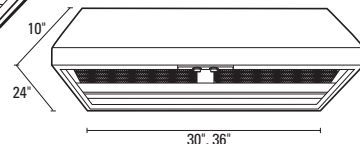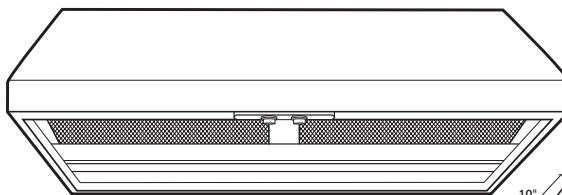

MODEL	LIGHTING	WIDTH	HEIGHT	DEPTH
APF1030	Dual 18 Watt	30"	10"	24"
APF1036	Dual 18 Watt	36"	10"	24"
APF1830	Dual 18 Watt	30"	18"	24"
APF1836	Dual 18 Watt	36"	18"	24"

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: West Chester, PA 19380
 Phone: (877) 304-3785
 Fax: (610) 696-8048
 Email: sales@airkinglimited.com

Canada: Brampton, Ontario L6T 2J3
 Phone: (905) 456-2033
 Fax: (905) 456-1015
 Email: casales@airkinglimited.com