

Diagram A

## Tetsu 42" Wall System

# \*NOTE: THE MANUFACTURER RECOMMENDS THE INSTALLATION OF SOLID BLOCKING WITHIN THE WALL TO REINFORCE **J-RAILS**

- 1) Remove J-Rails(2) and console support arms(2) from the back of Wall System
- 2) Install console support arms through back of Tetsu wall System using #10 x 2 1/2" screws as shown in diagram "B", page 2
- 3) Secure J-Rails(2) Upper at 77" / Lower at 40 5/8" Top Edge Angle Cut, above finished floor(AFF), with  $\#10 \ge 1/2$ " to wall in order to place the top of the console 32" from finished floor, check level, refer to diagram "A"
- 4) Install faucet as per manufacturer instructions
- 5) Mount Wall System on secured J-Rails(2)
- 6) Remove drawer from console unit
- 7) Slide console over console support arms
- and secure with #8 x 3/4" screws
- 8) Install sink as per manufacturer instructions
- 9) Re-install console drawers

## REPLACEMENT PARTS

- Door c/w Circular Mirror(1) 10 11/16" x 27 3/4" Veneer G2S

Hardware included

- Door(1) 10 11/16" x 27 3/4" Veneer G2S
- Door Hinge(2 Pair) Knife Hinge
- Metal Support Brackets(2) 2 <sup>3</sup>/<sub>4</sub>" x 4" x 20 7/8"
- J-Rail Wall Mount(2) 3/4" x 3" x 40"L Solid Poplar


### **Recommended Tools**

:12 -#8 x 3/4" L Pan Head Wood Screws :16 -#10 x 2 1/2"L Flat Head Wood Screws above slot drive

- : Level
- : Tape Measure
- : Drill
- : Screwdriver

# 42" WALL UNIT ONLY 08 MAR 06 95050-00

1 OF 2

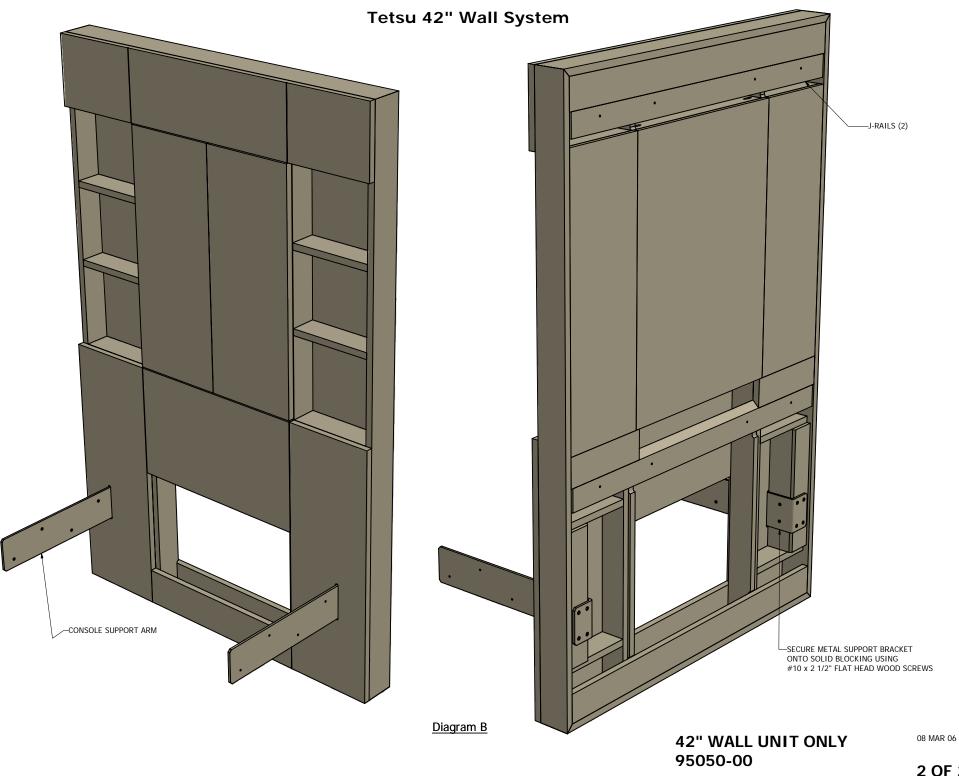

2 OF 2