

INSTALLATION INSTRUCTIONS FOR P989-077-L

For LED Pendant

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture and mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation. Use the gloves provided to prevent scratching or damaging the fixture body.

ASSEMBLING THE FIXTURE (Fig.1)

3. This fixture includes three 12" and one 6" rod. Determine the desired hanging and connect rods (H), (J), (K), (L), with nipples (I). Attach the rod assembly to nipple (M) on fixture body. Attach the rod assembly to the swivel (F) on canopy (E).

CONNECTION THE WIRES (Fig. 2)

4. Connect the white input wire from the driver (C) to the white wire from the junction box. Connect the black input wire from driver (C) to the black wire from the junction box and tuck the driver (C) and connected wires carefully inside the junction box (Fig. 2). (Note: To be installed with a 4" round or octagon junction box)
5. Secure mounting crossbar (B) to the junction box using mounting screws (D) (Size: 8-32*1/2"L). The side of the mounting crossbar marked "GND" must face out.
6. Connect the red output wire from driver to the red input wire from the fixture. Connect the black output wire from driver to the black input wire from the fixture, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper) connect the fixtures ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting crossbar (B) using the green screw (S) provided. Tuck the wire connections neatly into the junction box.

FINISHING THE INSTALLATION (Fig. 1)

7. Align canopy (E) to studs (A) and secure with cap nuts (G).
8. Loosen screws (N) from hex nuts (Q) to separate cage (R) from metal pan (O). Hang the crystal strands (P) through the loops on metal pan (O). (Note: A total of 44 crystal strands are included). Align cage (R) to metal pan (O) and secure with screws (N).

Your installation is now complete. Return power to the junction box and test the fixture.

CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or metal pan (O) only.

Notice

Due to the techniques used in manufacturing of this product, small tooling marks may be visible on the outside of the shade where it is attached to the support frame. All products are inspected to ensure they adhere to our quality control standards.

Fig.1

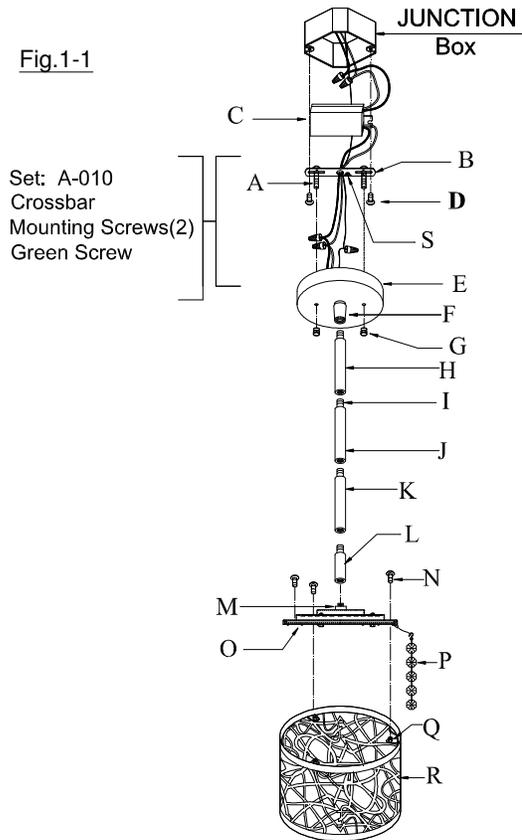


Fig. 2

<p>DRIVER WIRES Black</p>	<p>DRIVER WIRES White</p>	<p>FIXTURE WIRES Green or Bare Copper (Ground)</p>
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green or Bare Copper (Ground)</p>

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with C-L (CFL & LED) type and Incandescent/Halogen type dimmers




Fig. 3

Replacing LED module (Fig.1 & Fig.3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details.

Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.

- Loosen screws (N) on the metal pan (U) and remove the cage and all of the crystal strands (P).
- Loosen hex nuts (D') to remove metal panel (C'). And then remove hex nuts (B') and plastic gaskets (A').
- Disconnect the LED module by unplug the wire connector (W) and (V) and carefully remove LED module (Z).
- Reverse steps a-c for installing the new LED module.
- Note: The LED module should be provided by a specified supplier.
- For better heat dissipation the LED module should be applied with thermal grease when re-lamping.

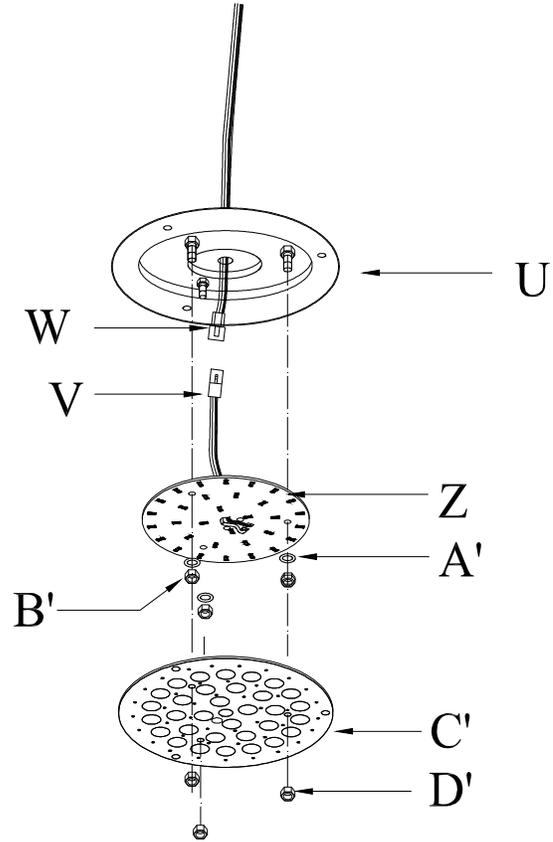

Replacing LED driver (Fig.1)

- Loosen cap nuts (G) to remove canopy (E) from ceiling.
- Loosen screws (D) to remove the mounting crossbar (B).
- Disconnect the wires to remove the LED driver (C) from the junction box.
- Replace the new driver and re-do from step 4. to assemble the fixture.

Brand: Lutron

Ordering Information Boxed Clamshell

Model number	Product name	Control type	Maximum capacity
 DVCL-153P-	Diva C-L	Single-pole/3-way dimmer-	150 W CFL/LED or 600 W Incandescent/ Halogen 120 V
 DVCL-153PH-			
 DVSCCL-153P-	Diva C-L Satin Colors		
 CTCL-153P-	Sklark Contour C-L		
 CTCL-153PH-			
 AYCL-153P-	Ariadni C-L	Single-pole lamp dimmer	100W CFL/LED or 250W Incandescent/ Halogen 120v
 AYCL153PH-			
 TTCL-100H-	Credenza C-L		