

Motion Activated SECURITY LIGHTING

Heath[®]/Zenith

SPECIFICATION SHEET

Model # **SL-5798-WH**



Available Color: White (SL-5798-WH)

SPECIFICATIONS

Power Supply

- 120VAC, 60 Hz

Wires

- AWG#18 (UL Recognized)

Max Load

- Up to 300 Watts Maximum Incandescent

Replacement Lamp

- T4, 100W Maximum G8 halogen bi-pin 120 VAC

Range

- Up to 100 Feet

Operating Modes

- TEST, AUTO/ACCENT, MANUAL

ON-Timer

- TEST, 1, 5, 20 Minutes

DUALBRITE[®] Timer

- OFF, 3, 6 hours, or dusk-to-dawn

Lamp Modes

- Security, BulbSaver, or AlertFlash



Features

- 270° motion detection angle
- Selectable on-time from 1, 5, or 20 minutes
- Adjustable sensitivity
- 10 Year Warranty

Applications

- Corners of a house or other building

Operating Modes

TEST: Overrides the photocell to allow the light to be setup during daylight hours.

AUTO/ACCENT: Lights automatically come on when motion is detected and then dim to 50% brightness when DUALBRITE[®] is turned on.

MANUAL: Lights stay on full bright until dawn. Photocell then resets light to AUTO mode.

DUALBRITE[®] Timer

Dims light to 50% power for accent lighting. There are 4 preset selections for the amount of time the lights stay on: Off, 3, 6 hours, or dusk-to-dawn.

ON-Timer

Turns lights on full bright when motion is detected.

There are 4 preset selections for the amount of time the lights stay on: Test (5 seconds), 1, 5, 20 minutes.

Adjustable Sensitivity

You can adjust the motion sensor's sensitivity to movement of heat.

Lamp Modes

SECURITY ("NORMAL"): Light instantly comes on.

BULBSAVER ("SOFT"): Light starts dim and gradually increases to full brightness. Light gradually dims to half-bright, pauses, and then continues dimming to off when motion is no longer detected and after selected ON-TIME.

ALERTFLASH ("FLASH"): Light flashes on then off twice before turning on full brightness.

JOB #

JOB NAME


HeathCo[™]

2445 Nashville Road
P.O. Box 90045
Bowling Green, KY 42102-9045


Tech Service (800) 858-8501
Sales (270) 846-8400
Fax (270) 846-8501

www.heath-zenith.com


USAGE & COVERAGE

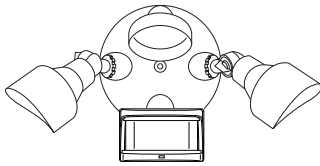

WALL MOUNT


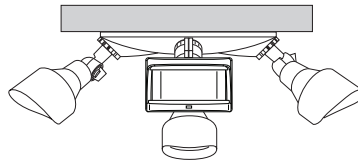


EAVE MOUNT

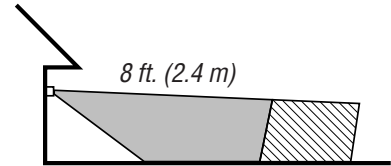

70 ft. (21 m) 100 ft. (30.5 m)
Boosted


MAXIMUM RANGE

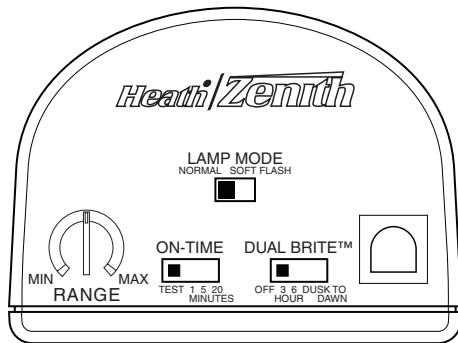

MAXIMUM COVERAGE ANGLE (TOP VIEW)

WIRING

! WARNING: Turn power off at the circuit breaker before wiring.

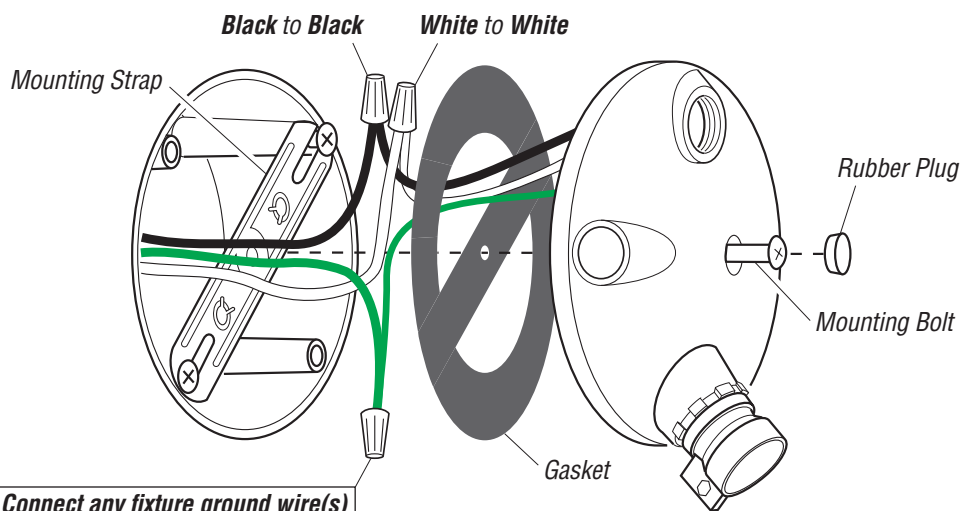

Connect any fixture ground wire(s) to the junction box ground wire.