




Lighting Your Life Since 1970

Product Specifications - 87916MB

Job Name:	Job Type:
Quantity:	Comments:

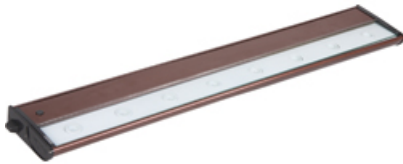

87916MB

CounterMax MX-L120 30" LED Under Cabinet Light

Uses MXInterLink3 accessories. Click [here](#) for a complete list of compatible accessories.

Finish

Metallic Bronze

Glass/Shade

Product Category

Under Cabinet

Lamping

Number of Bulbs	8
Light Type	LED
Bulb Type	LED
Max Bulb Wattage	1
Max Fixture Wattage	8
Rated Life	±50,000 Hours
Rated Lumens	±640
Color Temp	±3,000 K
Bulb(s)	Integrated
Light Up/Down	N/A
Beam Spread	120
CRI	70-75
Photo Cell Included	N/A
Ballast/Driver/Transformer	No
Dimmable	No

Measurements

Width	5.0"
Height	1.3"
Length	30.0"
Extension	N/A
Back Plate Width	N/A
Back Plate Height	N/A
HCO	N/A
Min Overall Height	N/A
Max Overall Height	N/A
Hanging Weight	3.9 lbs
Height Adjustable	N/A
Slope	N/A
Chain Length	N/A
Wire Length	N/A
Canopy Width	N/A
Canopy Height	N/A
Canopy Length	N/A

Shipping

Carton Weight	3.9 lbs
Carton Width	7"
Carton Height	3"
Carton Length	34"
Carton Cubic Feet	0.32
Master Pack	6
Master Pack Weight	32.0 lbs
Master Pack Width	13.9"
Master Pack Height	9.0"
Master Pack Length	34.5"
Master Cubic Feet	2.49
UPS Shippable	Yes

Certification

Safety Rating	Dry
Energy Star	No
CA Title 24	No
CA Title 20	No
ADA	No
Dark Sky	N/A

Other

UPC Code	783209069206
Shades Included	N/A
Crystals Included	N/A
Diffuser Included	N/A
Conversion Kit	N/A
Material	N/A

Equivalents

Incandescent Watts	58.18
Fluorescent Watts	12.8

Maxim Lighting International and all designs, logos and images © 2013 Maxim Lighting International. All Rights Reserved. Maxim Lighting International reserves the right, at any time, to make changes in the design and/or construction of the product including the discontinuation of product without prior notice. Color may vary from what is pictured above due to limitations inherent to photographic processes.

Always consult a qualified, licensed electrician before installation of any product weighing 35 pounds or more. We recommend that a qualified, licensed electrician do the installation. Always install to a mechanically sound structure.