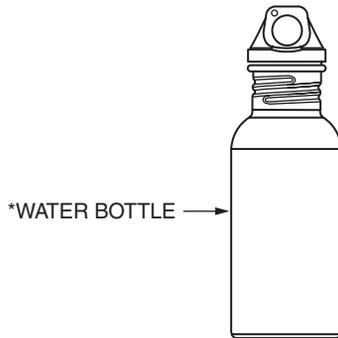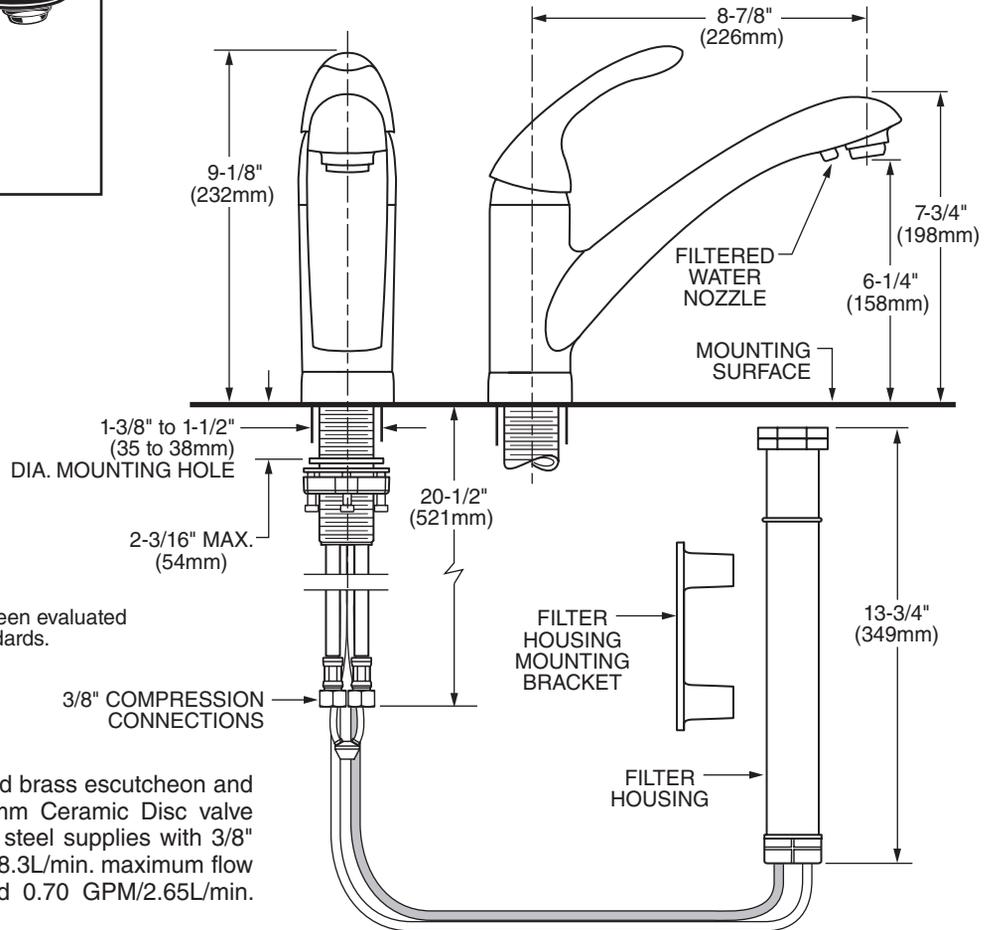# American Standard
Style That Works Better

MODEL NUMBER:

❑ **4662.001 Water Filtration System Kitchen Faucet**
Single-Hole Mounting. Filter mounted below deck.

*WATER BOTTLE

*Note: The water bottle has not been evaluated to the NSF/ANSI 42 and 53 standards.

Dimensions from diagram:
- 9-1/8" (232mm)
- 8-7/8" (226mm)
- 7-3/4" (198mm)
- 6-1/4" (158mm)
- FILTERED WATER NOZZLE
- MOUNTING SURFACE
- 1-3/8" to 1-1/2" (35 to 38mm) DIA. MOUNTING HOLE
- 2-3/16" MAX. (54mm)
- 20-1/2" (521mm)
- 13-3/4" (349mm)
- FILTER HOUSING MOUNTING BRACKET
- 3/8" COMPRESSION CONNECTIONS
- FILTER HOUSING

GENERAL DESCRIPTION:

Metal body and swivel spout, stamped brass escutcheon and metal lever handle. Washerless 47mm Ceramic Disc valve cartridge. Flexible braided stainless steel supplies with 3/8" compression connections. 2.2 GPM/8.3L/min. maximum flow rate @60 PSI from the aerator and 0.70 GPM/2.65L/min. filtered water.

PRODUCT FEATURES:
Integrated faucet control via patented Ceramic Disc Valve Cartridge:

Memory Position Valving: Allows user to turn valve on and off at predetermined temperature setting without readjusting handle position each time. Large temperature control zone**.**

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains _0.25% total lead content by weighted average**.**

Filtration Characteristics: Meets NSF 42 and NSF 53. Extra long-life Capacity - 250 gallons of usage or 90 days before filter replacement. High Flow Filter capability at .70 GPM/2.65L/min. Superior Filtration properties. Ultra-simple Filter Replacement Technique.

Installation: Single-Hole Mounting. Filter mounted below deck. Filter Housing Mounting Bracket provided (4662.001).

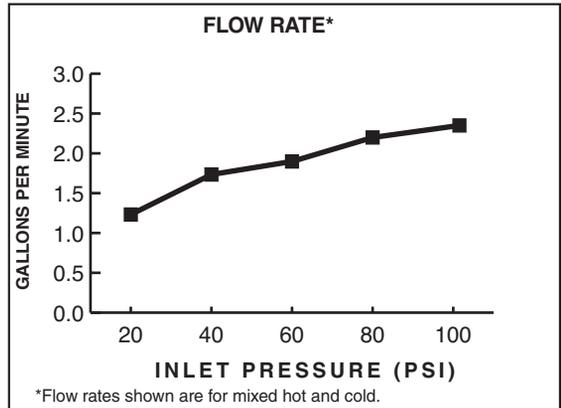**Choice of Finishes:** Choice of Polished Chrome or Stainless Steel (PVD).

SUGGESTED SPECIFICATION:
Single control kitchen filter faucet shall be constructed of a metal body and swivel spout and metal lever handle. Shall also feature a washerless ceramic disc valve cartridge that regulates temperature, volume and diverts the flow of water from the aerator to the filtered water discharge. Fitting shall be American Standard Model # 4662.001._____.

American Standard
Style That Works Better

CODES AND STANDARDS

This product meet or exceed the following codes and standards:

ASME A112.18.1
ANSI/ICC A117.1
CSA B125.1
Federal Safe Drinking Water Act
NSF 61 Section 9 & Annex G
NSF 42
    Chlorine Reduction   **97.0%**
    Improves Taste
    Eliminates Odor
NSF 53
    Reduces Lead   **99.2%**

FLOW RATE*

[Graph: GALLONS PER MINUTE (y-axis 0.0 to 3.0) vs INLET PRESSURE (PSI) (x-axis 20 to 100). Data points approximately: (20, 1.25), (40, 1.75), (60, 1.9), (80, 2.2), (100, 2.35)]

INLET PRESSURE (PSI)

*Flow rates shown are for mixed hot and cold.

Product Number	Description	Finish Options	
		Polished Chrome	Stainless Steel
		002	075
4662.001	Water Filtration System - Kitchen Faucet. Single-Hole Mounting.		

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.