


SHOWER SYSTEMS BODY SIDE SPRAY

Style That Works Better

Model #	Description	Finishes	Roughing-In Dimensions
1660.125	"TREVI" DELUXE ADJUSTABLE BODY SIDE SPRAY • Self Cleaning Patented Design: Flexible ring with spray holes prevents lime scale build up. • Spray Pattern: Variable spray adjusts from a conventional spray to a massage action. • Simple Spray Adjustment: Spray position adjusts up to 20° in any direction. • Flow Restrictor: 2.5 gpm/9.5L/min.	.002 Polished Chrome .008 Polished Nickel .068 Blackened Bronze (PVD) .099 Polished Brass (PVD) .295 Satin Nickel (PVD)	38mm (1-1/2) 2-1/4 (75-89mm) 40° DIA.

SHOWER SYSTEMS FLOWISE® WATER SAVING SHOWERHEADS


	FLOWISE® W
Description	Finishes
FloWise® WATER SAVING SHOWERHEAD • Up to 40% water savings • Turbine Spray at Max. 1.5 gpm/5.7L/min. • Angle adjustable	.002 Polished Chrome .068 Blackened Bronze (PVD) .099 Polished Brass (PVD) .295 Satin Nickel (PVD)
FloWise® WATER SAVING SHOWERHEAD • Showerhead only • Max. 1.5 gpm/5.7L/min.	
	FloWise® WATER SAVING SHOWERHEAD • Up to 40% water savings • Turbine Spray at Max. 1.5 gpm/5.7L/min. • Angle adjustable FloWise® WATER SAVING SHOWERHEAD • Showerhead only

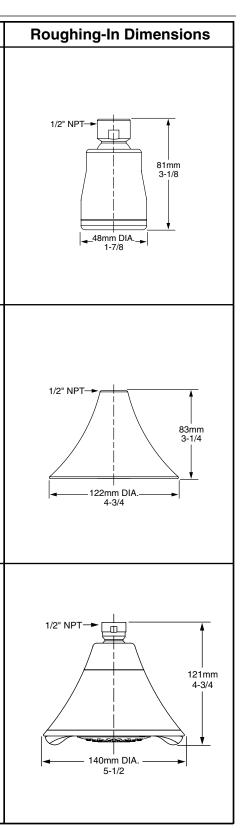



FloWise® STYLED WATER SAVING **SHOWERHEAD**

- Up to 40% water savings Turbine Spray at
- Max. 1.5gpm/5.7L/min. Angle adjustable





1660.715

1660.733


1660.717



FloWise® WATER SAVING **SHOWERHEAD**

- Showerhead only
- Max. 1.5 gpm/5.7L/min.

FloWise® DUAL FUNCTION WATER SAVING SHOWERHEAD



- Turbine spray at 1.5 gpm flow rate Full spray at 2.0 gpm flow rate Combination spray at 2.0 gpm
- flow rate
- Auto return feature defaults to 1.5gpm/ 5.7L/min. Ultra Water Saving Mode
- Angle adjustable
 Max. flow rate: 2.0gpm/7.6L/min.

FloWise® WATER SAVING SHOWERHEAD

- Showerhead onlyMax. flow rate: 2.0gpm/7.6L/min.

.002 Polished Chrome .068 Blackened Bronze (PVD)

.002 Polished Chrome .099 Polished Brass (PVD)

.295 Satin Nickel (PVD)

- .099 Polished Brass (PVD)
- .295 Satin Nickel (PVD)

F76

