




Family: Dwell | Item No. 1321 BK



Drawing 1 - Fixture Mounting

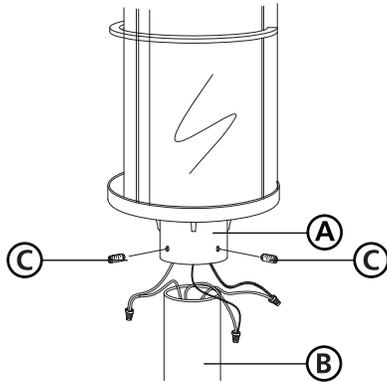

Drawing 2 - Glass Replacement

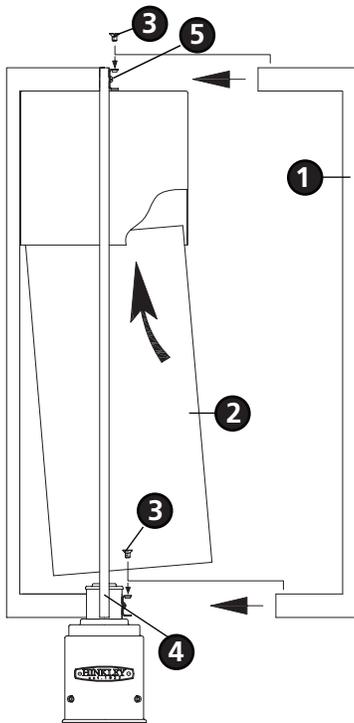

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the glass, making all necessary electrical connections, and then mounting the fixture to the pole.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

2. Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

3

1. One upright (1) is removable to facilitate installation or replacement of the glass and lamping of the fixture - see **Drawing 3**.
2. Remove screws (3) from top of fixture and pull upright (1) off fixture.
3. Fixture can now be lamped accordingly.
4. Tilt glass (2) and slip up into top of fixture, lift glass (2) over center hub (4) and set on uprights (1).
5. Slide upright (1) back onto the fixture, over the brackets (5), lining up holes in upright (1) with holes in brackets (5).
6. Thread top screw (3) into top of bracket (5).
7. Lift glass (2) up and using a short screw driver, thread screw (3) into bracket (5) to secure lower portion of upright.

4

1. After wiring connections are complete, slip post fitter (A) over top of pre-installed post (B) making sure all wire connections are tucked inside the pole - see **Drawing 1**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws (C) into pre-tapped holes in post fitter.
4. Tighten screw (C) to secure fixture to post.

Note: Maximum wattage for 1321 fixture is 100 watts per bulb.

11.15.09