


# INSTALLATION INSTRUCTIONS

USA

## LINE VOLTAGE PENDANT

### CIRO 120

ART. NO. 110 119bz/CF/MP	bronze, compact fluorescent, white fritted	110 122bz/CF/MP	bronze, compact fluorescent, red
110 119bz/IN/MP	bronze, incandescent, white fritted	110 122bz/IN/MP	bronze, incandescent, red
110 119ch/CF/MP	matte chrome, compact fluorescent, white fritted	110 122ch/CF/MP	matte chrome, compact fluorescent, red
110 119ch/IN/MP	matte chrome, incandescent, white fritted	110 122ch/IN/MP	matte chrome, incandescent, red
110 121bz/CF/MP	bronze, compact fluorescent, gold-leaf	110 123bz/CF/MP	bronze, compact fluorescent, lava
110 121bz/IN/MP	bronze, incandescent, gold-leaf	110 123bz/IN/MP	bronze, incandescent, lava
110 121mc/CF/MP	matte chrome, compact fluorescent, gold-leaf	110 123mc/CF/MP	matte chrome, compact fluorescent, lava
110 121mc/IN/MP	matte chrome, incandescent, gold-leaf	110 123mc/IN/MP	matte chrome, incandescent, lava

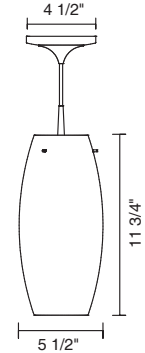

## IMPORTANT SAFETY INSTRUCTIONS



1. Read all instructions!
2. Turn off power prior to any work on the canopy.
3. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE.
4. This LINE VOLTAGE PENDANT MUST BE HARD WIRED, 120v. For all the wire connections, use Listed Wire Nuts.
5. Warranty is void in case of unauthorized modifications and/ or improper use.

READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE SYSTEM

### This Package Contains: CIRO 120 - qty.(1)

- Insert screw (A) into the mounting plate (B).  
 Align screws (A) with the J-box and tighten until firmly connected.

- There are markings on the cable wire (C) showing; L is for Line Voltage, N is for the Neutral Connection, and G is for the Ground Connection.

**Warning! If cutting cable wire make note which side is L, N, and G.**

- Adjust the cable length (C) by loosening the center cable lock (D).

- Place the canopy cover (E) over the mounting plate (B) and secure it with the allen screw (F) located on the side of the base.

#### Lamp Replacement:

- Unscrew the conical (G) and pull the conical upwards. Lift glass (H) till socket (I) is visible from the bottom.

- Replace lamp into the socket lower glass and screw conical into place.

