




3966-SF FB

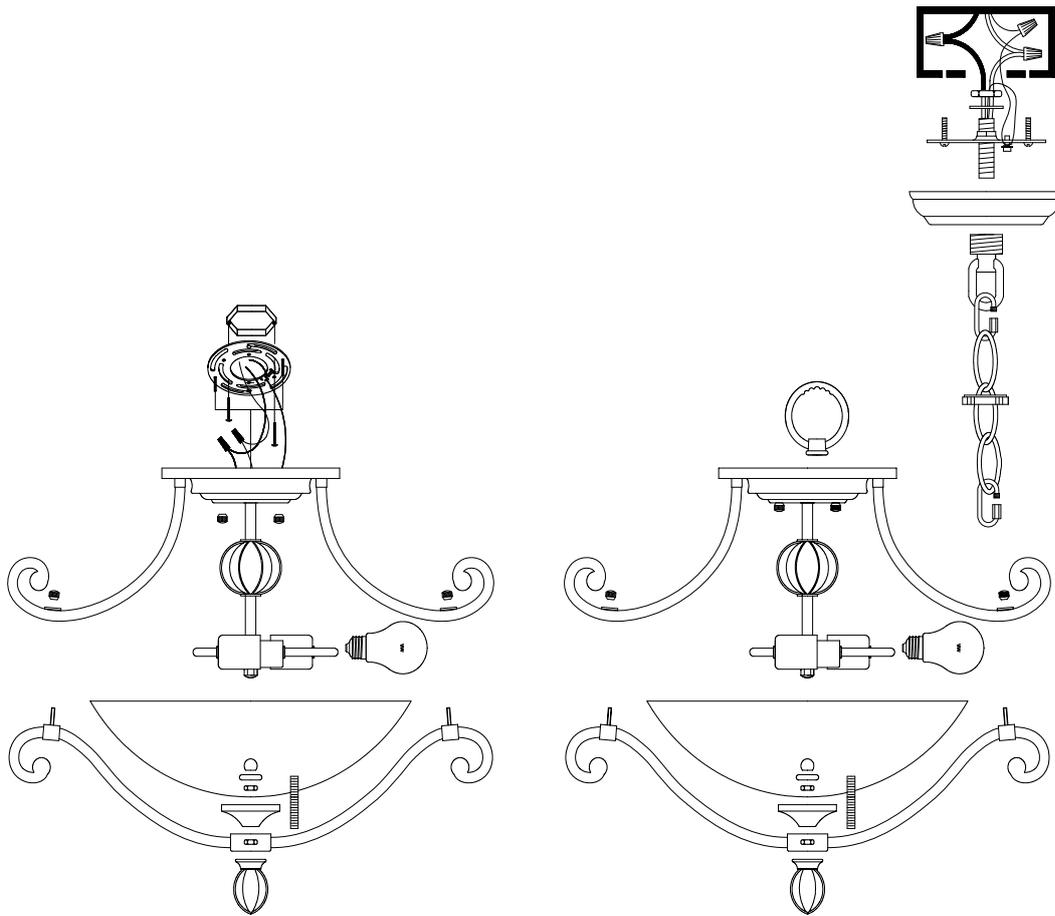

# INSTALLATION INSTRUCTION FM-1



## For Flush Mount Ceiling Fixtures

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**

### MOUNT THE FIXTURE

1. Shut off power at the fuse box or circuit breaker box. Remove the old fixture from ceiling. Including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Mounting Screws (A) about 1/4" into the pre-drilled holes in the Crossbar (B) spaced the same distance apart as the holes in the Ceiling Pan (D).
4. Attach the Crossbar (B) to the Outlet Box using the two Screws (C) from the Outlet Box. The side of the Crossbar marked "GND" must face out.
5. While holding the Ceiling Pan (D) toward the ceiling, Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) wire. Connect the white wire from the fixture wire to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connect fixtures ground wire to it. Otherwise connect fixture's ground wire directly to the crossbar using the green screw provided. Tuck the wire connections neatly into the ceiling junctions box as you hold the Ceiling Pan assembly toward the ceiling.
6. Finish mounting the Ceiling Pan (D) by placing it over the Crossbar (B) with Mounting Screws (A) so that they protrude through the "Keyholes" in the bottom of the pan. Rotate the Pan until the screws are in the slots of the "Keyholes" and tighten with a screwdriver.
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
8. Thread the Nipple (E) into the Ceiling Pan (D). Place the Glass Shade (F) over the Ceiling Pan (D) allowing the Nipple (E) to protrude through the bottom hole in the glass.
9. While holding the Glass Shade, place a washer & mounting Nut onto the threaded Nipple (E) & tighten, slide Bottom Cap (G) tighten finial (H).

Your installation is now complete. Return power to the junction box and test the fixture.

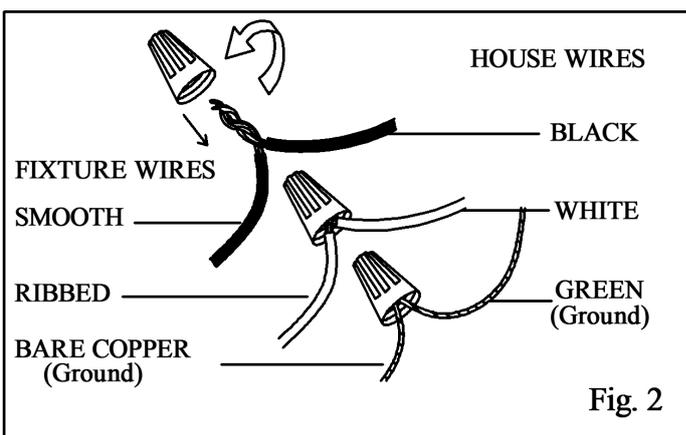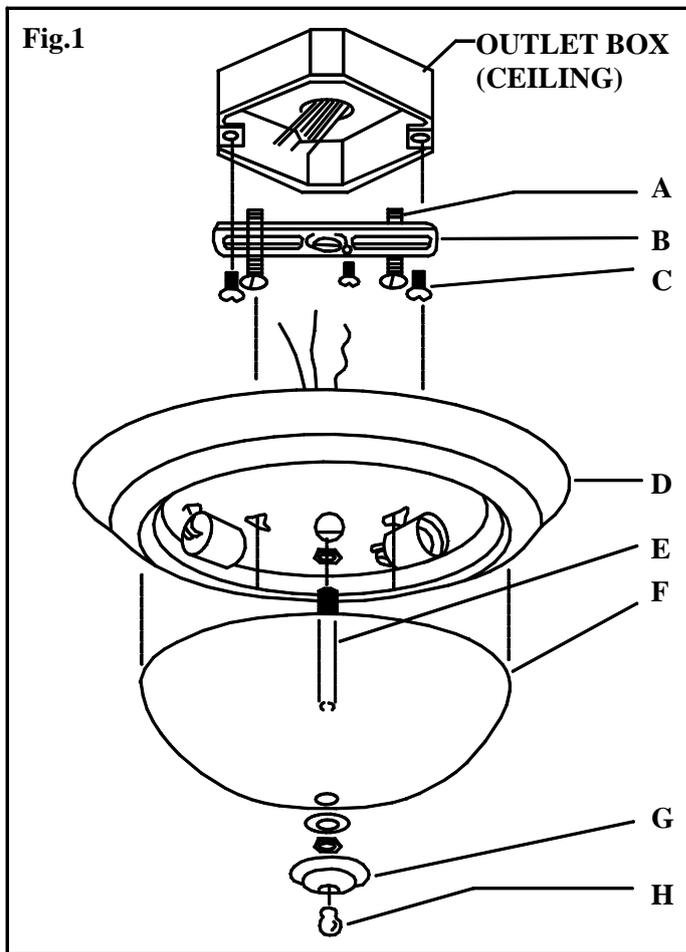

**CAUTION-RISK OF FIRE. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR MIN 90°C SUPPLY CONDUCTORS.**


# INSTALLATION INSTRUCTION CH-1

## For Chandelier Light Fixtures (Rev.07-02-07)

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER**

### HANGING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Carefully unpack new fixture and lay all the parts on a clear surface.
3. Thread nipple (C) into loop (F) until snug.
4. Thread other end of nipple (C) with loop attached into crossbar (D) until snug.
5. Place lock washer (B) over of nipple protruding through crossbar and thread hex nuts (A) onto nipple until tight.
6. Take this crossbar assembly and mount to ceiling junction box with junction box screws (E) .Tighten screw securely with screwdriver.
7. Use a pair of pliers to open one end link (I) of the chain provided, and connect to the fixture loop (J). Close the link.
8. By measuring, determine correct number of links needed for proper hanging height. Using pliers disconnect and discard remaining chain.
9. Lace the fixture wires through every third chain ring .
10. Slip loop collar (H) over the chain, then do the same with the canopy (G).
11. Open the other end link (I) of the chain and hang the fixture on the loop at the ceiling. Close the link.
12. Feed the fixture wires through the loop (F), and nipple (C) and pull until taut.

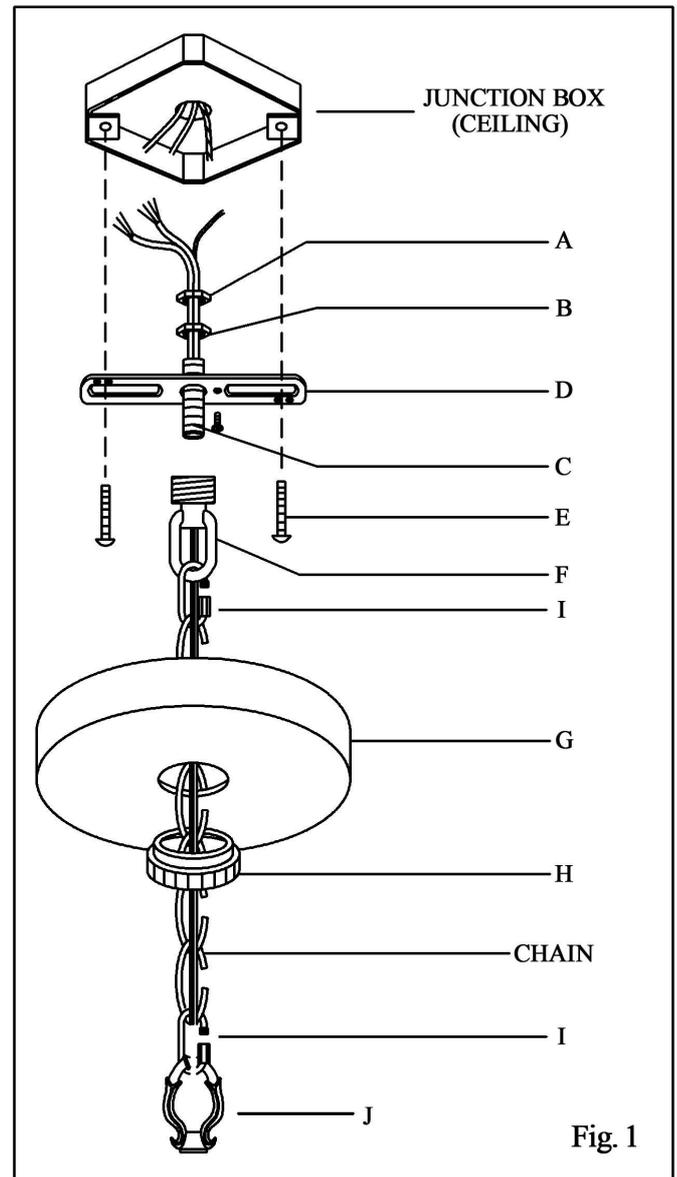

### CONNECTING THE WIRES (Fig.2)

13. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wires until snug.
14. Repeat same process with white junction box wire and ribbed wire of fixture.
- NOTE: Twist wires together in the same direction you twist the wire connector onto wires.
15. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as in step 13. If junction box has no ground wire, attach the bare copper fixture wire to the junction box with a screw.
16. Tuck these wire connections neatly into the ceiling outlet box and then raise the canopy (G) all the way to the ceiling. Raise the loop collar (H) and thread onto ceiling loop protruding through canopy.
17. Install the light bulbs in accordance with the fixtures specifications.

**NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE.**

Your installation is now complete. Turn power on at to the junction box & test the fixture.

