


65340LF ▲



Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

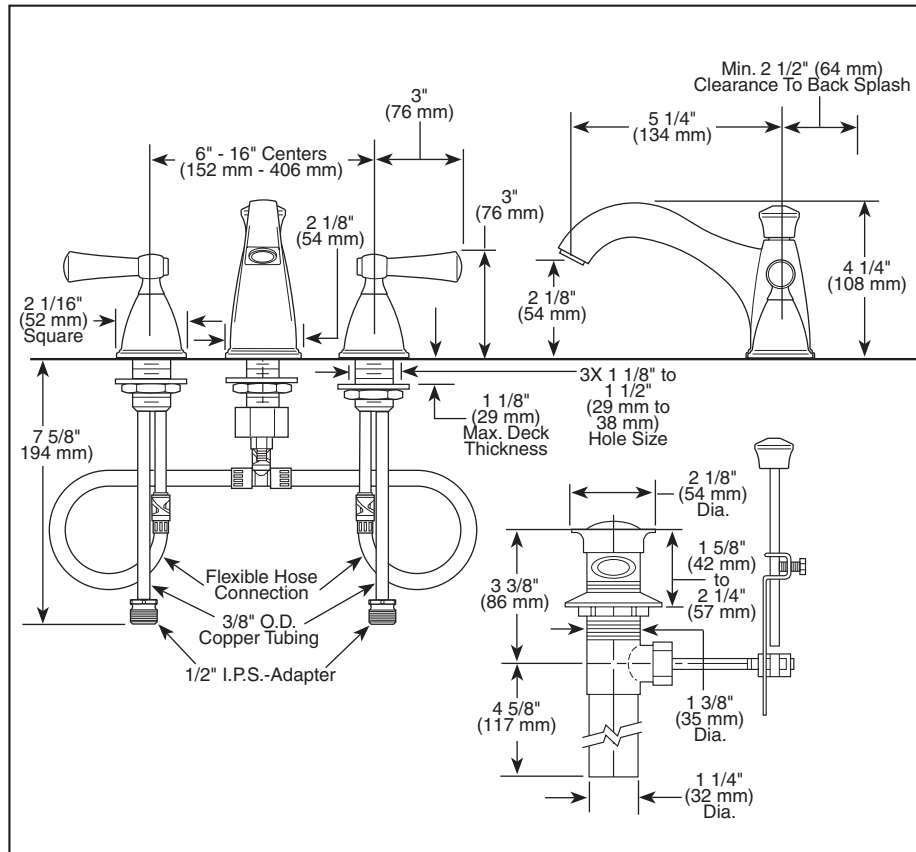

▲ Designate Proper Finish Suffix

# BRIZO®

## LAVATORY FAUCETS

- Vesi™ Collection Curved Spout
- Ceramic Disc Valving
- Two-Handle Widespread
- 3 Hole Sink Applications
- 6" – 16" Centers
- Quick Snap® Installation

### STANDARD SPECIFICATIONS:

- Two-handle lavatory faucets for concealed mounting on 3 hole sinks.
- Widespread – 6" to 16" centers.
- Ceramic disc valving.
- Hot and cold stems are interchangeable.
- Solid brass fabricated end valve and spout bodies.
- 1/4 turn stops may be removed for 180° rotation.
- Quick connect hoses and self-locating bases.
- Metal drain has pop-up type fitting with plated flange and stopper.
- Maximum 1.5 gpm flowrate @ 60 PSI.
- Note: Standard mounting deck thickness can be extended 1" with RP10612.

### WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2

Indicates compliance to ICC/ANSI A117.1

- EPA WaterSense
- Verified compliant with .25% weighed average Pb content regulations.

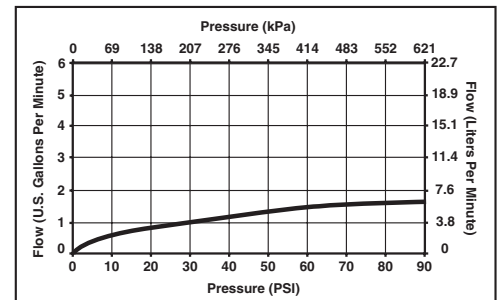

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.brizo.com](http://www.brizo.com) for finish options and product availability.

BSP-L-65340LF Rev. B

**Delta Faucet Company**  
 Indianapolis, Indiana 46280  
 A Division of Masco Corporation of Indiana  
 © 2009 Masco Corporation of Indiana