


BENNETT®

Old World Quality New Age Design

CALLAN®

DIMENSIONS

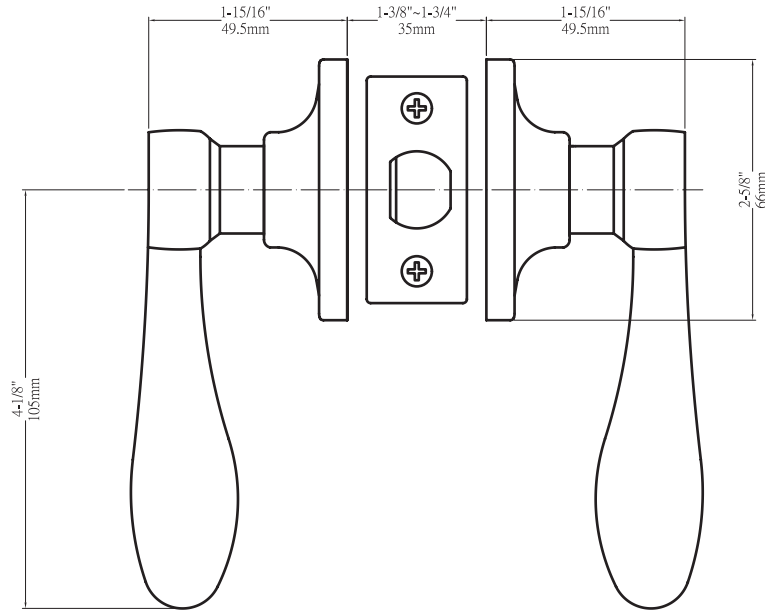


STANDARD SPECIFICATIONS

Door Prep	Cross bore: 2-1/8" Edge bore: 1" Latch face: 1" x 2-1/4"
Backset	Fits 2-3/8" and 2-3/4"
Door Thickness	1-3/8" ~ 1-3/4" door standard
Cylinder	KW1 5-pin standard; SC1 5-pin optional Entries packed KA5
Latches	Entrance: 2-3/8" & 2-3/4" adjustable (9073) Passage/Privacy: 2-3/8" & 2-3/4" adj. (9074) Faceplate: 1" x 2-1/4" round corner Bolt: 1/2" throw
Strikes	1-3/4" x 2-1/4" full lip round corner (9103)
Wood Screws	Combination screws that suit both wood or metal door mounting
Door Handing	Reversible lever. Handing required for Dummy function only.


PRICING

Model	Function	WT/CTN	CTN QTY		US3	US15	US15A	US10BE	BLACK
500T - BE	Entrance	35 Lbs	20 Pcs	Item No.	BE5103	BE5101	BE5108	BE5107	BE5104
				List Price					
501T - BE	Passage	23 Lbs	20 Pcs	Item No.	BE5013	BE5011	BE5018	BE5017	BE5014
				List Price					
502T - BE	Privacy	24 Lbs	20 Pcs	Item No.	BE5023	BE5021	BE5028	BE5027	BE5024
				List Price					
515 - BE	Dummy	15 Lbs	20 Pcs	Item No.	BE5053	BE5051	BE5058	BE5057	BE5054
				List Price					

FUNCTIONS

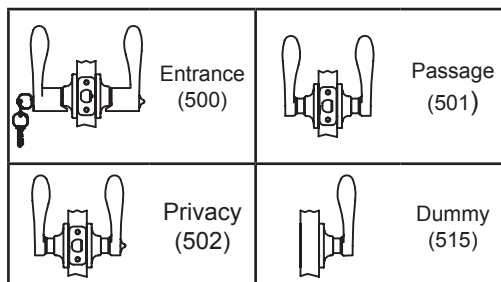

HANDING GUIDE

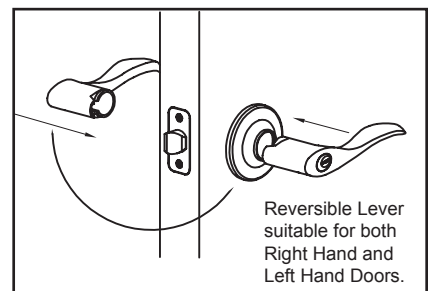

THE DELANEY CO.

Copyright © THE DELANEY CO. All rights reserved.