










Fixture Name: Cerchi 1030-WSC CH

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Mounting Strap	1ea		Junction Box Screw	2ea		Mounting Screw	2ea	
Wire Connector	3ea		Hex Nut	2ea		Deco Nut (round nut)	2ea	
Green Ground Screw	1ea		Shade Screw	2ea		Finial	1ea	

Part Needed	_____	Quantity	_____
Part Needed	_____	Quantity	_____
Reason why	(missing, scratched, broken glass, bent, bad finish)		
Comments	_____		

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

ASSEMBLING THE FIXTURE (Fig.1)


1. Attach Bottom Panel (I) to bottom of Back Plate (H) and slide Column Nipple (J) through Bottom Panel (I) and Bracket (L). Fasten in place with Finial (K), tighten until snug.

* You may now install the fixture.

2. Install light bulb in accordance with the fixture's specifications.

3. Secure the Shade (N) to Back Plate (H) with Shade Screws (M).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)
NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

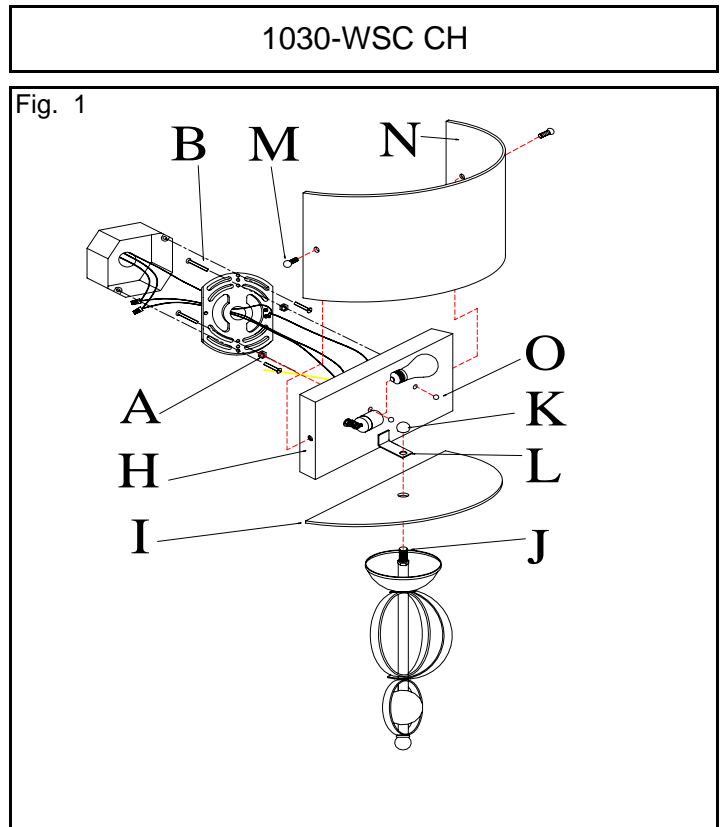

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (A) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back plate (H) and thread the two Mounting screws (B) half way into the Mounting strap (A).
4. Place the Mounting strap (A) over the Junction Box so the Mounting screws (B) are vertical or horizontal, as required by fixture type.
5. Attach the Mounting strap (A) to the Junction box using the two Mounting screws (D). Tighten the screws (D) securely with screw driver.

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A) or connect both wires together using the correct size of wire connectors.

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

8. Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig.3)

9. Place the fixture Back Plate (H), over the Mounting Screws(B), so it protrude through the holes in the Back Plate (H).
10. Thread the Deco Nuts (O) onto the Mounting Screws (B) and continue turning until the Back Plate (H) is snug against the wall.
11. Install the light bulb and shade as per the fixture assembly sheet.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

JUNCTION BOX

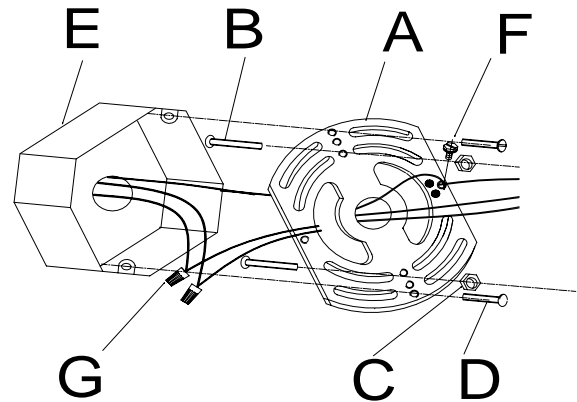


Fig. 2

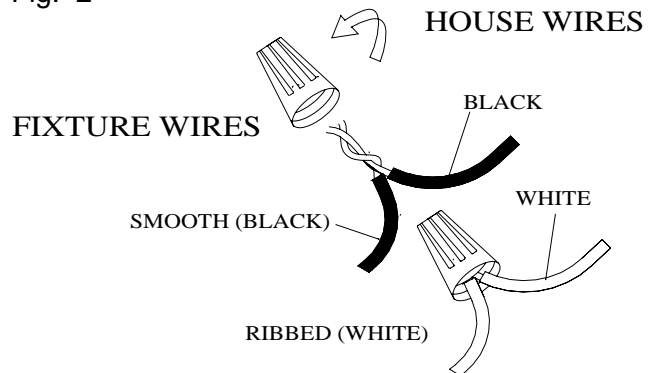


Fig. 3

