



Oiled Bronze Gilded Union with  
52" Outdoor Custom Oiled Bronze  
Blades and Integrated Light Kit

Model . . . **UN520BG4**  
Blade . . . **Included**  
Light . . . **Integrated**

# Union


## FEATURES

- Energy Saving, 2nd Generation, 6 Speed Reversible DC Motor
- 8" Downrod (Included)
- Limited Lifetime Warranty
- Custom Union Blades (Included)
- Integrated Light Kit (2-13W CFL Bulbs Included)
- Decorative Hardware is Included but Optional
- DC Remote and Wall Controls (Included)
- Suitable for Wet Locations

## SPECS

- Blade Sweep Opt. . . . . 52"
- Number of Blades . . . . . 4
- Blade Pitch . . . . . 14°
- Motor Size (MM) . . . . . 125 x 30
- AMPS (HI Speed) . . . . . <1
- Watts (HI Speed) . . . . . 29
- Shipping Wt. (lbs.) . . . . . 16.8
- CU. FT. in Carton . . . . . 1.99
- Airflow\* (Cubic Feet Per Minute) . . . . . 6,408
- Airflow Efficiency\* (CFM Per Watt) . . . . . 220

## CEILING DROP DIMENSIONS

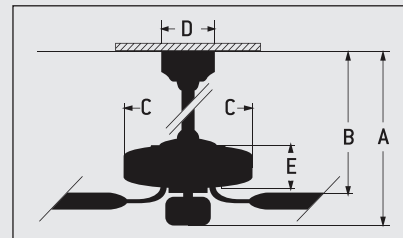

- A: 8" DR - 21.37"
- B: 8" DR - 15.67"
- C: 14.0"
- D: 5.125"
- E: 14.5"
- DR = Downrod

"Compare: 49" to 60" ceiling fans have airflow efficiencies ranging from approximately 51 to 176 cubic feet per minute per watt at high speed."



A



A Galvanized Union with 52" Outdoor Custom Light Oak Blades and Integrated Light Kit

Model-Finish **UN52GV4**  
 Blade-Finish **Included**  
 Light-Finish **Integrated**

AVAILABLE FINISHES

- GV** Galvanized
- OBG** Oiled Bronze Gilded

BLADE OPTIONS

Model Specific - All Available Options Shown  
 ABS Plastic

LIGHT KIT OPTIONS

Integrated Light Kit

RELATED PRODUCTS

See Exteriors Catalog for More Information  
 (see pages 10-11)



REMOTES



DC Remote Control  
 (Included)



DC Wall Control  
 (Included)