


ProPuck Xenon

6W 120V LED

Integrated / Linkable

PP-4WLED Series

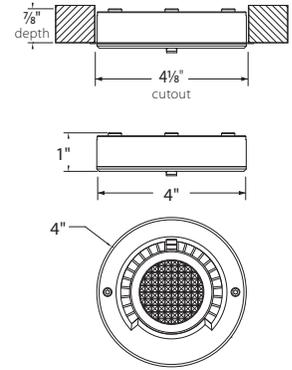

Xenon system, 120 Volt

No transformer required

- 20 Watt / 120 Volt Xenon lamp, (7,000 hour rated)
- Xenon models may link up to 50 units
- Dimmable with standard incandescent dimmer.
- Included lens: Metal honeycomb. Additional accessory lenses available.
- UL listed for portable & hardwire applications and as a wiring compartment; cUL when used with cUL strain relief
- Surface or recessed mount – not for recessed installation in ceilings or walls
- Complete with lamp, flange and clips for recessing, screws for surface mount and mini strain reliefs
- Dimmable with standard incandescent dimmer

Finishes

- Black (BK), Bronze (BZ), Satin Aluminum (SA) and White (WT)

Body

- Die cast aluminum construction for durability and excellent heat dissipation
- Hardwire knockouts on sides and back. Additional MC connectors available.
- Internal terminal block included, no wire nuts or connectors needed
- Integral mounting standoffs create an air-gap between fixture and mounting surface, minimizing heat transfer in surface mount applications.
- Multiple US patents pending 

ProPuck Xenon	Finish
<input type="checkbox"/> PP-BK-1	Black
<input type="checkbox"/> PP-BZ-1	Bronze
<input type="checkbox"/> PP-SA-1	Satin Aluminum
<input type="checkbox"/> PP-WT-1	White

Photometrics

- See www.csllighting.com for current photometric data

Project _____

Fixture Type _____

Location _____

Contact _____

Phone _____



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue City of Industry CA 91744 Tel: 626.336.4511 Fax: 626.330.4266 www.csllighting.com

ProPuck Xenon Accessories

Accessory Lenses



0-19 Prismatic
Spread



0-16 Mini
Prismatic



0-18 Linear
Spread



PP-OPTIC-60
60° Optic

Accessories



Part No.	Description
L-34A	20W 120V Frosted Xenon G8 150 lm, 7,000 hour rated life Fits only PP series



PP-CON	Flex conduit connector Fits up to 1/2" flex conduit Side knockout only
--------	--



INVWC3	Low profile wiring compartment 4"L 2 1/8"W 1"H
--------	---



PP-PLG-BK	Black cord w/ plug, 6'
PP-PLG-WT	White cord w/ plug, 6'



PP-CRD-BK	Black linking cord – 10 ft.
PP-CRD-WT	White linking cord – 10 ft.
PP-CRD-100-BK	Black linking cord – 100 ft.
PP-CRD-100-WT	White linking cord – 100 ft.



A Division of Troy-CSL Lighting, Inc.

14508 Nelson Avenue City of Industry CA 91744 Tel: 626.336.4511 Fax: 626.330.4266 www.csllighting.com