

GLAZED PAVER TILE

# UNION SQUARE™



 **dalTile**<sup>®</sup>  
DESIGN WITH CONFIDENCE™

# UNION SQUARE™

GLAZED PAVER TILE

*floor • wall • countertop*

## *Field Tile*



TERRACE BEIGE US01



HEIRLOOM ROSE US02



COURTYARD RED US03




COBBLE BROWN US04

# CREATIVE IDEAS



TERRACE BEIGE US01

HEIRLOOM ROSE US02

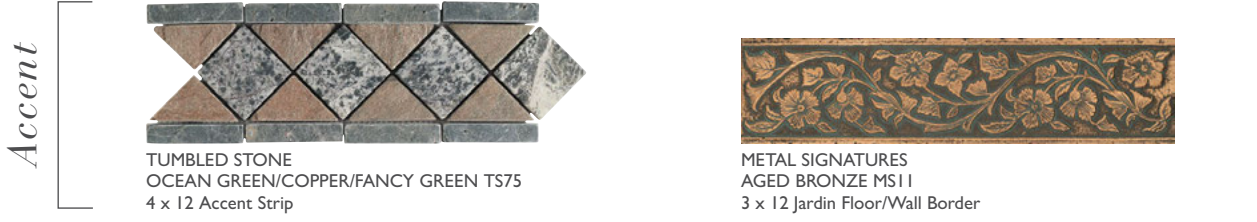

TUMBLER STONE  
OCEAN GREEN/COPPER/FANCY GREEN TS75  
4 x 12 Accent Strip

METAL SIGNATURES  
AGED BRONZE MS11  
3 x 12 Jardin Floor/Wall Border



COURTYARD RED US03

COBBLE BROWN US04



TUMBLER STONE  
COPPER TS73  
1 x 1 Tumbled Mosaic

TUMBLER STONE  
WALNUT TS19  
4 x 12 Pebble Accent Strip

## Pattern Ideas



HERRINGBONE

BASKETWEAVE

CORRIDOR  
HORIZONTAL

BRICK WEAVE VERTICAL

## SIZES

		SQ.FT. CARTON	PCS. PER CARTON
4 x 8 Paver	(3-7/8" x 8") (9.8 cm x 20.3 cm)	8.00	36
2 x 8 Brick	(2-1/4" x 8") (5.7 cm x 20.3 cm)	6.25	50

## RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	ED

## COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	LIGHT RESIDENTIAL	COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	✓
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking	✓	✓	✓	✓	✓
Pool Linings	✓	✓	✓	✓	✓

Suitable for freezing and non-freezing climates when proper installation methods are followed.

## NOTES

Since there is shade variation in all natural products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information, refer to "Factors to Consider" at <http://daltile.com/factors-to-consider.cfm>.

## SHADE VARIATION



**RANDOM (V4)**  
Extreme color and texture variation from tile to tile and within each tile; a random look.

## INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
7/16"	3/8"

## DYNAMIC C.O.F. (WET) : 2

The higher the rating, the higher the slip resistance.

1 < .42

2 ≥ .42

## STATIC C.O.F. (WET) : 3

1 < .50

2 .50 - .59

3 ≥ .60

## TEST RESULTS

	ASTM#	RESULT
Water Absorption	C373	< 1.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	7.5
Chemical Resistance	C650	Resistant
Dynamic C.O.F.	A137.1	Wet: ≥ 0.42
Static C.O.F.	C1028	Wet: ≥ 0.60 Dry: ≥ 0.80

Dynamic C.O.F. (Wet) value as measured by the DCOF AcuTest™ helps to assess a products suitability for a commercial environment. For more information, visit our website at [www.daltile.com/DCOF](http://www.daltile.com/DCOF).



By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit [daltilegreenworks.com](http://daltilegreenworks.com).



MADE IN  
THE U.S.A.



EXTERIOR  
PRODUCT

All or selected items within this series are made in the USA. For more information visit [www.daltile.com/UnionSquare](http://www.daltile.com/UnionSquare)



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 800.933.TILE  
For more information about Daltile products and services, visit our website at [daltile.com](http://daltile.com)