

COLORBODY™ PORCELAIN
TERRACE™



Professional
TILE SOLUTIONS

 **dalTile**[®]
DESIGN WITH CONFIDENCE™

TERRACE™

COLORBODY™ PORCELAIN



floor • wall • countertop

Experience the countryside with the new Daltile Terrace collection. This ColorBody™ Porcelain tile has the look of natural wood with a contemporary edge - perfect for high-traffic areas. Available in a plank size, it's on-trend, extremely durable, and easier to maintain than traditional wood floors. Ideal for commercial installations due to its versatile nature, this fashionable wood-look tile can give your residential space a modern flair as well. Surround yourself in the warm hues of this collection, available in six colors. Create ambiance and perfect your space.



Photo features Terrace Cherry 6 x 36 field tile in a staggered brickwork pattern on the floor.

TERRACE™

COLORBODY™ PORCELAIN

Field Tile



BIANCO P100



HICKORY P101



GOLD P102



WALNUT P103

floor • wall • countertop



CHERRY P104



ESPRESSO P105
















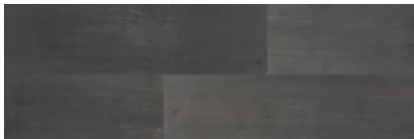


WILLOW P106



IRONWOOD P107

CREATIVE IDEAS

Decorative Accents

<i>Color</i>		
	BIANCO P100	HICKORY P101
<i>Accent</i>		
	TUMBLER STONE ADIGE WARM BLEND DA81 3 x 12-3/8 Split Face Accent	BRIXTON SAND BX02 4 x 9 Accent
<i>Color</i>		
	GOLD P102	WALNUT P103
<i>Accent</i>		
	TUMBLER STONE INDIAN MULTICOLOR S771 Random Tinda Natural Cleft 4 x 16 Sheet	MASSALIA BULLION MS91 1 x 6 Frieze Accent Strip
<i>Color</i>		
	CHERRY P104	ESPRESSO P105
<i>Accent</i>		
	MASSALIA COPPER MS92 1/2 x 6 Twist Accent Strip	TUMBLER STONE COPPER BLEND DA79 2 x 12 Accent
<i>Color</i>		
	WILLOW P106	IRONWOOD P107
<i>Accent</i>		
	FASHION ACCENTS BRIX NICKEL BLEND FA64	FASHION ACCENTS WROUGHT IRON GRAY FA32 3 x 8 Accent Strip


Pattern Ideas




STAGGERED BRICKWORK



HERRINGBONE



CORRIDOR HORIZONTAL



BASKETWEAVE

TERRACE™

COLORBODY™ PORCELAIN

SIZES

		SQ.FT. CARTON	PCS. PER CARTON
6 x 36 Field Tile	5-3/4" x 35-3/4" (14.6 cm x 90.8 cm)	12.00	8

Additional linear and rectangular sizes available through Linear Options™ - Daltile's linear cutting service. Visit www.daltile.com/lineartoptions for sizes and order information.

RESIDENTIAL USAGE

FLOORS	WALLS	COUNTERTOPS	EXTERIOR PATIOS	EXTERIOR POOL DECKS
F	W	C	EP	

COMMERCIAL USAGE

	INTERIOR			EXTERIOR	
	RESIDENTIAL	LIGHT COMMERCIAL	COMMERCIAL	RESIDENTIAL	COMMERCIAL
Floors/Patios	✓	✓	✓	✓	
Walls/Backsplashes	✓	✓	✓	✓	✓
Countertops	✓	✓	✓	✓	✓
Pool Decking					
Pool Linings	✓	✓	✓	✓	✓

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

NOTES

Special care should be taken when grouting dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A 1371.1 standards.


For additional information, refer to "Factors to Consider" at www.daltile.com/CommercialFactors.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

TRIM

TYPE	NUMBER	SIZE	PCS. PER CARTON
Bullnose	S-43H9	3 x 18	32

SHADE VARIATION



INSTALLATION

THICKNESS	GROUT JOINT RECOMMENDATION
1/2"	3/16" Floor

SLIP RESISTANCE (WET) : 3

The higher the rating, the higher the slip resistance.

1	< .50
2	.50 - .59
3	≥ .60

TEST RESULTS

	ASTM#	RESULTS
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 400 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Coefficient of Friction	CI028	Wet: > 0.60 Dry: > 0.70

TERRACE™

COLORBODY™ PORCELAIN



floor • wall • countertop



daltile
greenworks™
ENVIRONMENTAL LEADERSHIP THAT WORKS

By their very design, Daltile products can help make it easier for you to earn LEED™ points and/or points towards many industry leading green home building programs. From using recycled material content to establishing manufacturing facilities within 500 miles of your project, we help ensure you don't have to compromise your design to be environmentally conscious. For detailed information, visit daltilegreenworks.com.



EXTERIOR
PRODUCT

Professional
TILE SOLUTIONS



7834 C. F. Hawn Freeway | Dallas, TX 75217 | 214.398.1411 | 800.933.TILE
For more information about Daltile products and services, visit our website at daltile.com

©2012 Dal-Tile Corporation (6/12) SSPTERRAC