


### ROMAN TUB FAUCET WITH SOFT TOUCH PERSONAL SHOWER™

#### Description

- 2 handle with high-rise solid brass spout
- Soft Touch Personal Shower™ with integral diverter system\*
- Spout plug for pressure testing & plaster guard
- Fits 1 3/8" to 1 1/2" diameter mounting hole

#### Standards

- ASME A112.18.1
- CSA B125
- Listed IAPMO/UPC
- ADA Accessibility Guidelines for Buildings and Facilities - 4.27.4 Controls and Mechanisms (lever handles only) 

#### Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.



D314768 (shown)  
BRANDYWOOD™



#### With widespread rough-in valve:

D314766 (w/Personal Shower)  
D314768 (w/Personal Shower)

#### Available Colors & Finish

- Chrome
- Brushed Nickel (BN)

#### Handle Suffix:

- 66: cross handle



- 68: lever handle




#### Trim Kit: (for use w/rough-in valves)

D314666T (w/o Personal Shower)  
D314668T (w/o Personal Shower)

#### Special Packaging

- This product also available with valve packaged separate from trim.
- Use with rough-in valve: D210000BT (10" CC fixed) OR D215000BT (widespread)
- Valves are combination 1/2" copper sweat, 1/2" NPT threaded connectors for all ports

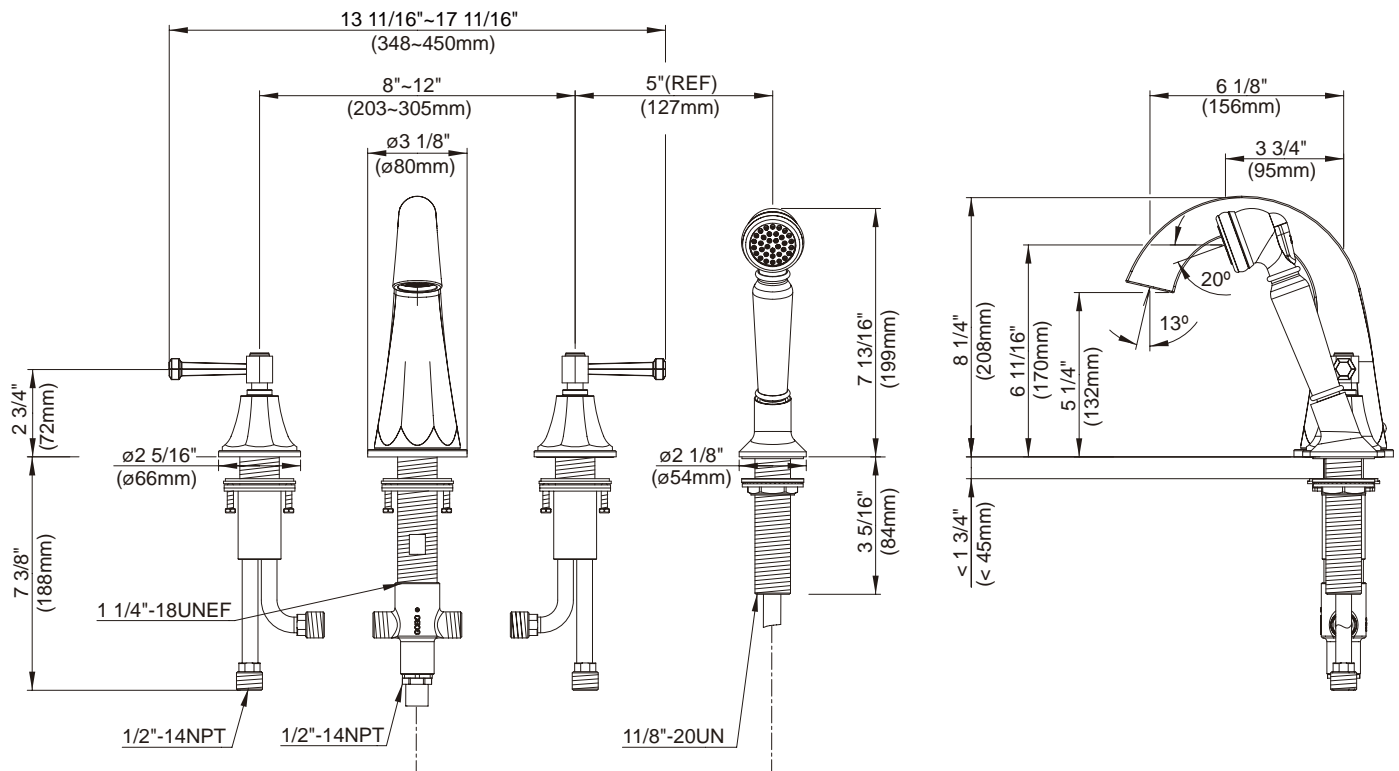


\* Danze Soft Touch Personal Shower™ is designed to operate only when the button is pressed; water will flow to the spout whenever pressure is released from the button.

Specific Features: \_\_\_\_\_ Submitted Model No.: \_\_\_\_\_

SD314768/09-07.02

### ROMAN TUB FAUCET ROUGH-IN VALVES-CRITICAL DIMENSIONS

Rough-in valve D215000BT (widespread)

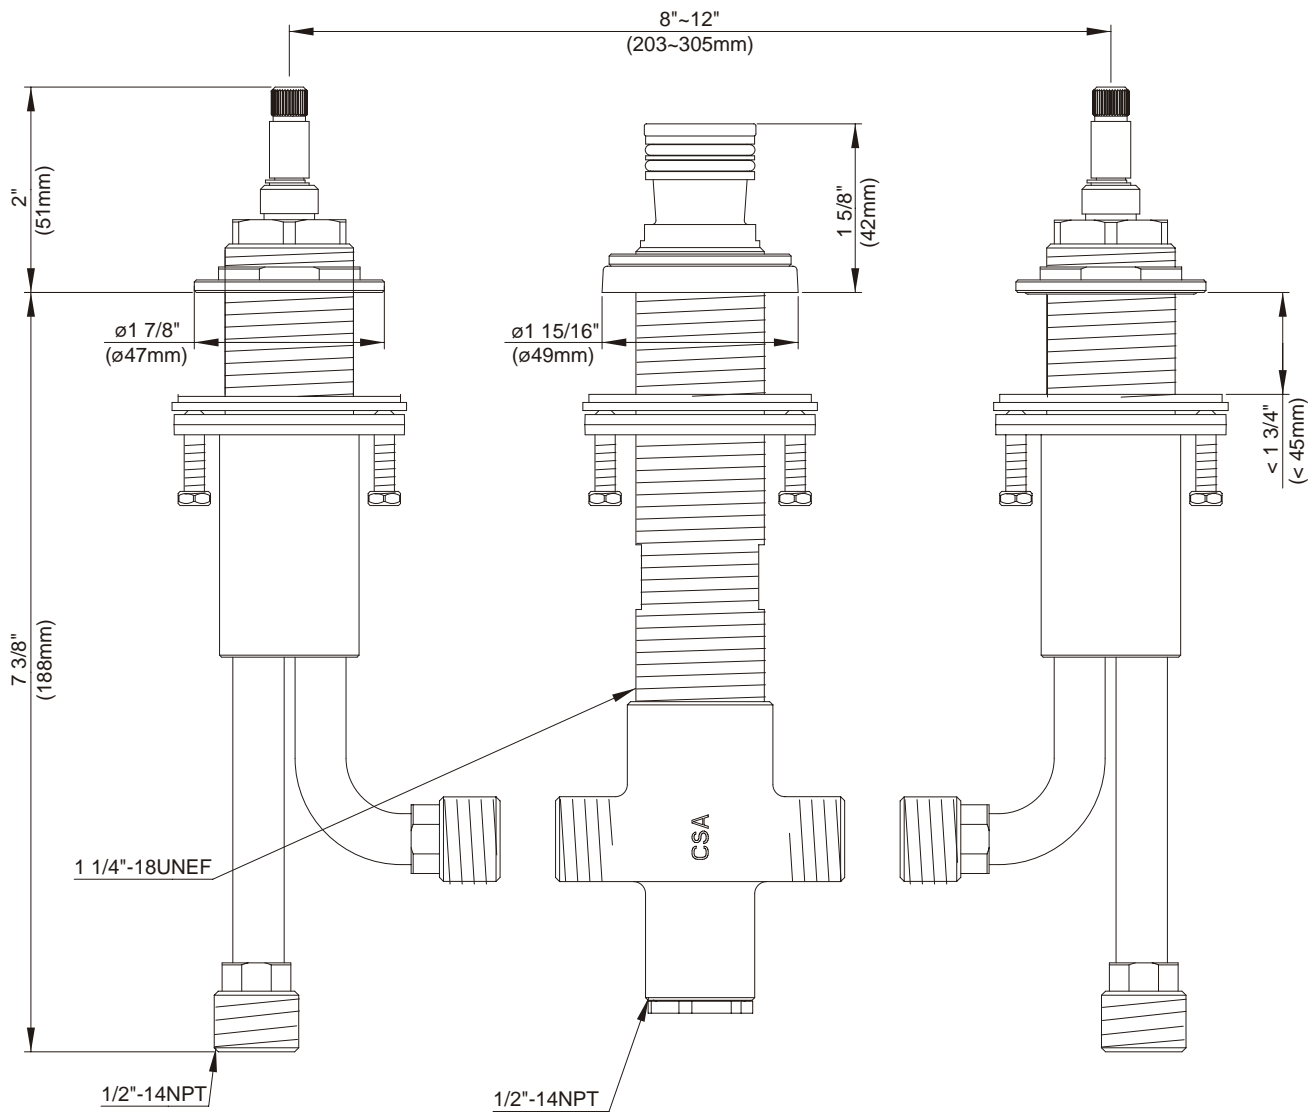

\* Installation method shown is for deck thickness of less than 1-3/4".  
If the installation is for deck thickness between 1-3/4" and 3-1/2", the sleeve nut needs to be reversed.

Specific Features: \_\_\_\_\_ Submitted Model No.: \_\_\_\_\_

SD314768/09-07.02