

## **Electronic Faucets**

Arzo® Battery operated deck mount electronic lavatory faucet with Proximity<sup>™</sup> Sensing Technology

# Model No: 601T040-HP

### **COMPLIES WITH:**

- CSA certified
- Complies to ASME A112.18.1
- ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. handle operating force
- NOTE: For optimum performance of this product, we reccommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds it's maximum intended pressure setting.
- (Contact Delta Representative for State and/or Local Approvals)



## SPECIFICATION:

- Deck mount electronic lavatory faucet
- Cast chrome plated brass spout
- Proximity<sup>™</sup> Sensing Technology
- Surface mount control box
- Mixing valve required (Order seperately)
- Battery Powered (4 "C" cell batteries, except when -HP selected)
- Outlet#: 40 Standard 1.5 USGPM (5.7 L/Min) Flow Control Aerator
- Hydro Power™

## **OPERATION:**


- Hands free (touchless) operation
- No visible sensor, the spout is the sensor
- Water flows when sensor is activated
- Water flow stops upon deactivation of the sensor
- Auto shut-off feature factory set to 45 seconds. Will reset and recalibrate once obstruction is removed
- Adjustable sensing distance 0 to 89mm (0 to 3.5"), factory set to 89mm (3.5") ± 3.18mm (1/8")
- Low battery audible beep will activate after faucet shuts off when approximately 1500 cycles remain

#### (Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced August 16, 2012.



#### Model No: 601T040-HP

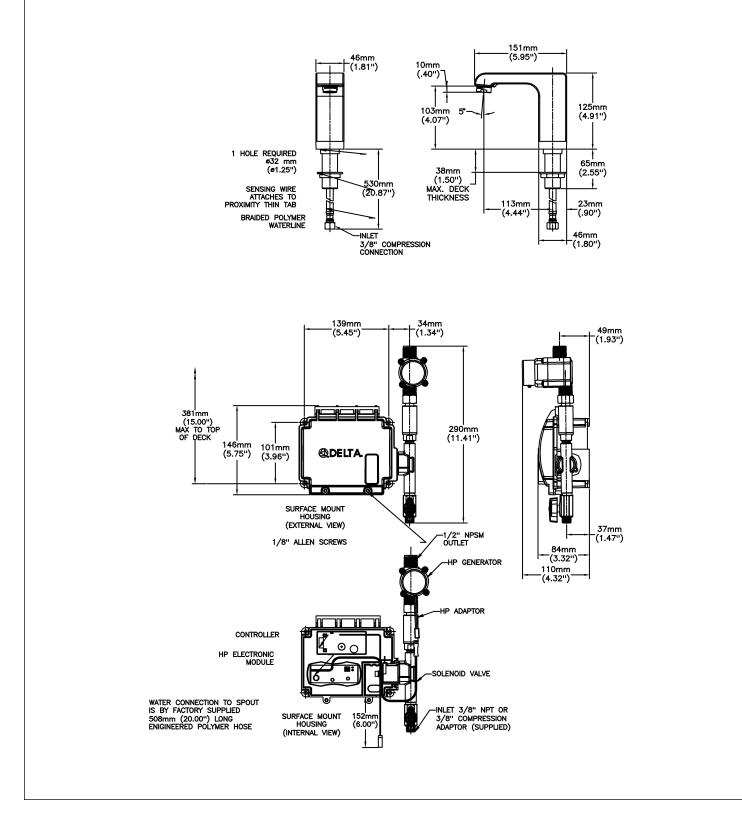

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced August 16, 2012.