





Specific Features:

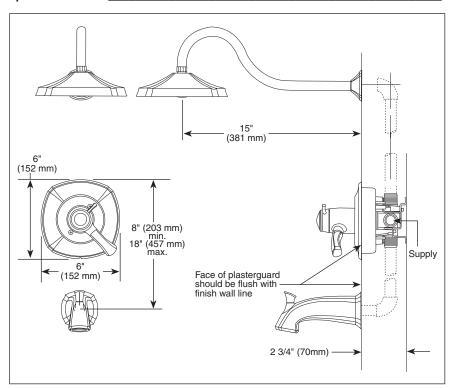

▲ = Designate Proper Finish Suffix









TUB AND SHOWER **FAUCET TRIM**

- Addison[™] Bath Collection
- TempAssure[®] Thermostatic
- Valve Only (T17T092 Series)
- Shower Only (T17T292 Series)
- Tub/Shower (T17T492 Series)

STANDARD SPECIFICATIONS:

- TempAssure® 17T thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6°F.
- Must also order R10000-UNBX rough valve body.
- Back-to-back installation capability.
- Solid brass forged body.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit rotation into hot water zone.
- All parts are replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- H₂O Kinetic Technology® 2.5 gpm @ 80 PSI.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.






COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A1 17.1







55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2009 Masco Corporation of Indiana

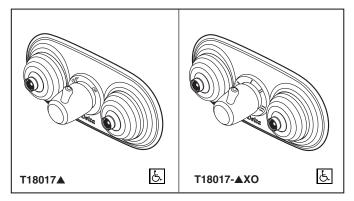

Specific Features:

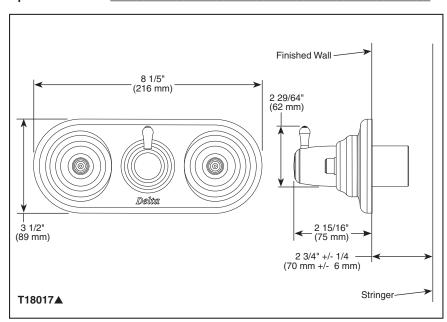

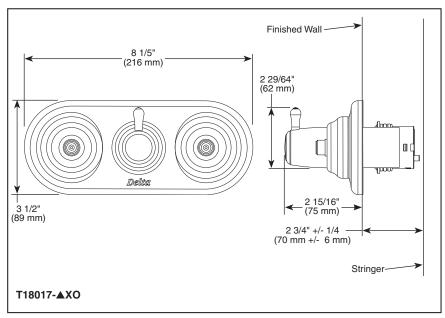

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

ODELTA

CUSTOM SHOWER DIVERTER

- Innovations® Collection
- Jetted Shower Diverter Trim (T18017)
- Six Function Diverter Trim (T118017-X0)
- Coordinates With All Delta Innovations® Styled Bath Suites

STANDARD SPECIFICATIONS

- Jetted shower 2 individual positions,
 1 shared position On, or shower only Off.
- Six function diverter. 3 individual positions, 3 shared positions.
- 1/2" rough-in.
- Must also order R1827 or R1827-XO rough-in.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.






COMPLIES WITH:


ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1




55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2010 Masco Corporation of Indiana

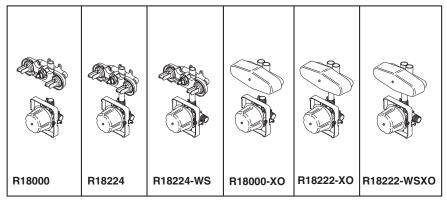

Specific Features:

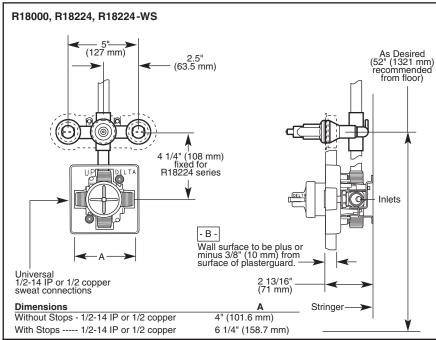

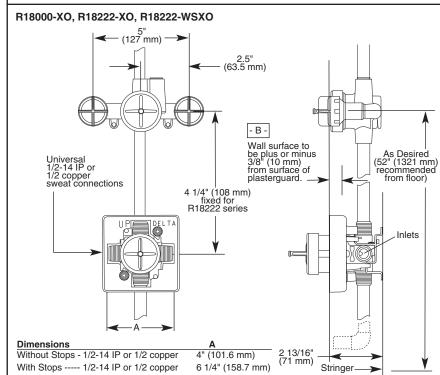

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-B-R18000 Rev. A



JETTED SHOWER™ ROUGH VALVE BODY

- Shower Only (R18000 & R18224)
- Shower and Extra Outlet (R18000-XO & R18222-XO)

STANDARD SPECIFICATIONS:

- Brass body.
- Back-to-back installation capability.
- Can be tested with air (200 psi) or water (300 psi) without cartridge using supplied test cap.
- Adjusts for up to 3/4" wall thickness.
- Extra outlet models (XO) include 3 port, six position diverter.
- R18222 and R18224 include prefabricated valve and jet module.
- R18000 and R18000-XO include separately plumbed valve and jet module.
- For use with Multi Choice Universal 18 Series and 18T Series Jetted Shower™ trim. Monitor® 17 Series dual function pressure balanced cartridge ships with 18 Series trim. 17T Series dual function thermostatic cartridge ships with 18T Series trim.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




COMPLETE VALVE COMPLIES WITH:

■ ASME A112.18.1 / CSA B125.1



Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2009 Masco Corporation of Indiana



Specific Features: _

T1817 2" (50.8 mm) Plus or minus 1/2" (38 mm) Solve Covers must be removed prior to installation of trim. As Desired

T1837 2" (50.8 mm) Plus or minus 1/2" (38 mm) Covers must be removed prior to installation of trim. As Desired

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.

ODELTA

JETTED SHOWER XO™ JET MODULE TRIM

- T1817 Series
- T1837 Series

STANDARD SPECIFICATIONS:


 For use with 18 Series Jetted Shower XO[™] valve body rough (R18222 or R14442) and Jet Module Rough (R1817).

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLETE VALVE COMPLIES WITH:


• ASME A112.18.1 / CSA B125.1





Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2006 Masco Corporation of Indiana


DSP-B-T1817 Rev. A 2.D._





JETTED SHOWER ROUGH MODULE

■ Jet Module Rough Only (R1817)

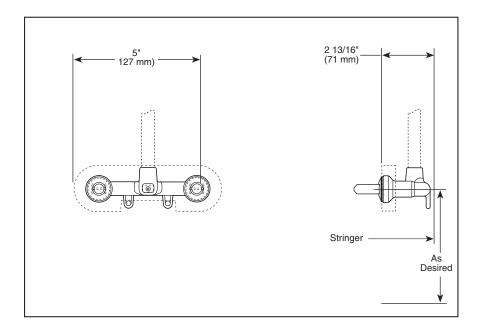

STANDARD SPECIFICATIONS

- Requires 1 1/2" (38 mm) wall cavity.
- Solid brass body.
- Back-to-back installation capability.
- Adjusts for up to 1 1/4" (32 mm) wall thickness.
- The orientation of the inlet is not important.
- Additional outlet option for jetted shower XOTM series.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

ANSI/ASME A112.18.1 / CSA B125.1

