




Submitted Model No.:


Specific Features:

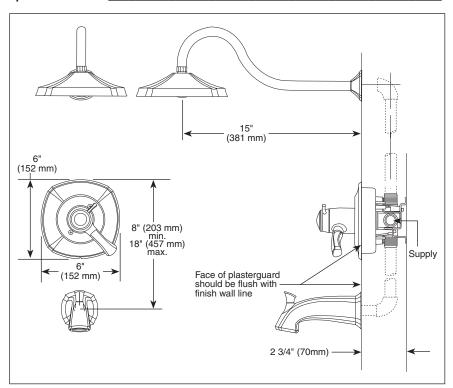

▲ = Designate Proper Finish Suffix









TUB AND SHOWER **FAUCET TRIM**

- Addison[™] Bath Collection
- TempAssure[®] Thermostatic
- Valve Only (T17T092 Series)
- Shower Only (T17T292 Series)
- Tub/Shower (T17T492 Series)

STANDARD SPECIFICATIONS:

- TempAssure® 17T thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6°F.
- Must also order R10000-UNBX rough valve body.
- Back-to-back installation capability.
- Solid brass forged body.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit rotation into hot water zone.
- All parts are replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- H₂O Kinetic Technology® 2.5 gpm @ 80 PSI.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.






COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASSE 1016

Indicates compliance to ICC/ANSI A1 17.1







55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2009 Masco Corporation of Indiana

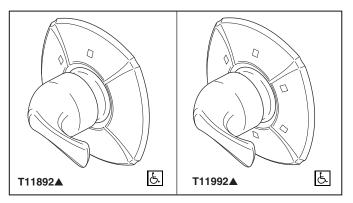

Submitted Model No.:

Specific Features:

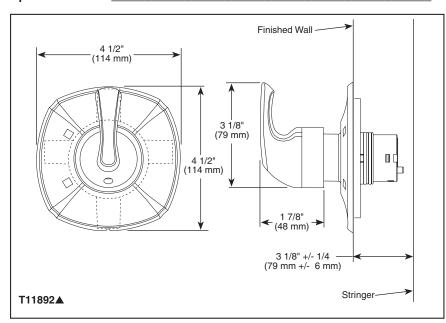

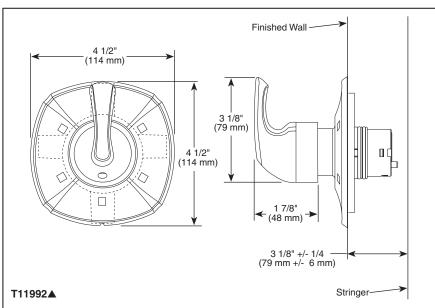

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

ODELTA

CUSTOM SHOWER DIVERTER

- Addison[™] Collection
- Three Function Diverter Trim (T11892)
- Six Function Diverter Trim (T11992)
- Coordinates With All Delta Addison^{fm} Styled Bath Suites

STANDARD SPECIFICATIONS

- Three function diverter. 2 individual positions, 1 shared position.
- Six function diverter. 3 individual positions, 3 shared positions.
- 1/2" rough-in.
- Must also order R11000 rough-in.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.






COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
 Indicates compliance to
- IAPMO Listed
- CSA Certified



55 E. 111th Street, Indianapolis, Indiana 46280 395 Matheson Blvd. E., Mississauga, ON L4Z 2H2 © 2010 Masco Corporation of Indiana



Submitted Model N	D.:
Specific Features: _	

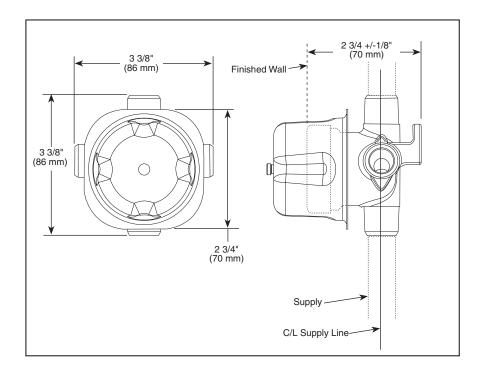



ROUGH VALVE BODY

- R11000 (Case Qty. 3)
- 1/2" Rough-In

STANDARD SPECIFICATIONS

- Three port diverter rough.
- For use with (3) three or (6) six function diverter.
- Forged brass body.
- Can be tested with air (200 psi) or water (300 psi) using supplied test cap.
- Refer to the installation instructions for more details.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.






COMPLIES WITH:

ASME A112.18.1 / CSA B125.1



Submitted Model No.:	
Specific Features:	



▲ = Designate Proper Finish Suffix

Spray Pattern



Full Spray

Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.



PERSONAL HAND HELD SHOWERS

- 69" (1753 mm) Plastic Hose
- Certified Dual Check Valves
- 24" Wall Bar, Wall Mount or Shower Arm Mount

STANDARD SPECIFICATIONS:

- ABS hand held shower with one spray pattern – not a positive shut-off.
- 69" (1753 mm) flexible plastic hose.
- Certified dual check valves for backflow protection.
- 24" (610 mm) wall bar with adjustable slide (allows for adjustable shower height) -59210 only. Not to be used as a Grab Bar. Not ADA compliant.
- Wall mount bracket 57923 only.
- 2.0 qpm @ 80 psi (7.6 L/min @ 552 kPa)


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.




COMPLIES WITH:


■ ASME A112.18.1 / CSA B125.1 ◆









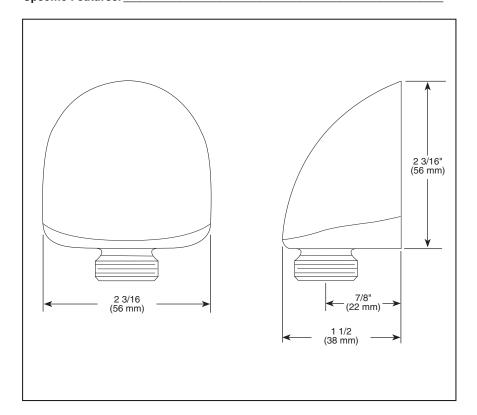

STANDARD SPECIFICATIONS

- Solid brass construction.
- 1/2" female NPT inlet.
- 1/2" male NPSM outlet for connecting to shower hoses.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

COMPLIES WITH:


• ASME A112.18.1 / CSA B125.1





Submitted Model No.:

Specific Features: _

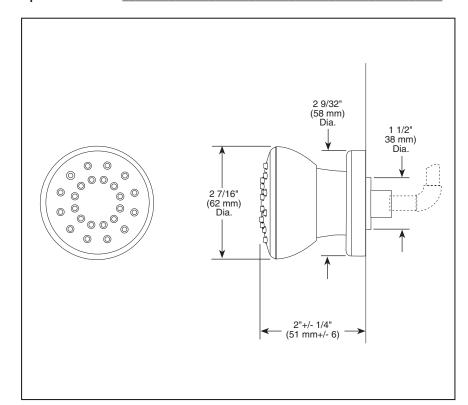



BODY SPRAY

- 2.0 GPM
- 1/2" Rough-In

STANDARD SPECIFICATIONS

- 1/2" rough-in.*
- 30° up and down adjustment.
- 2.0 gpm @ 80 PSI.
- Solid brass construction.
- Matching finish spray face.
- Touch-clean® nubs.
- *Note: This installation requires a 1/2" male threaded pipe fitting to extend 1/4" beyond the finished surface.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.








COMPLIES WITH:

ANSI/ASME A112.18.1 / CSA B125.1





Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.