





Delta BreezGreenBuilder Ventilation Fan / Light Combo Specifications

VFB080C4L1
(80 CFM)

Dimensions

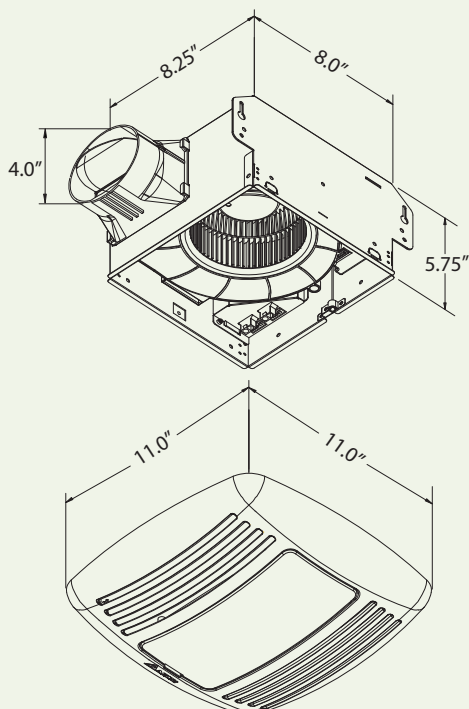

Fan Curve

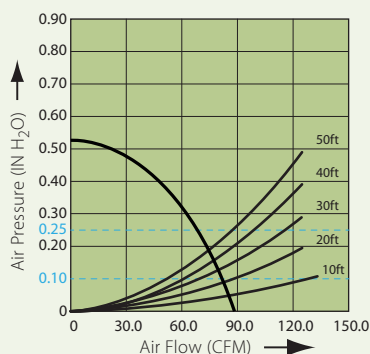

Description

Low noise ceiling mount ventilating fan with DC Motor and light rated for continuous running. Evaluated by Underwriter Laboratories and conforms to both UL and cUL safety standards.

Motor/Blower

- Power Rating of 120volts/60Hz.
- DC Brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Permanently lubricated motor.

Housing

- Galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built in backdraft damper.
- Easy installation.

Grille

- Attractive design using ABS material.
- Attaches directly to housing with included grille bracket.

Light

- One GU24 26-Watt compact fluorescent lamp included.

LED Indicator

- Turn on the power to operate ON/OFF, and LED indicator is Green.

Warranty

- 3 year limited warranty.

Features

- For ceiling mount only, air flow of 80 CFM ($\pm 10\%$) and 0.8 Sones at 0.1" static pressure.
- Power consumption approximately 8.7 Watts with an efficiency rating approximately 9.2 CFM/Watt at 0.1" static pressure.
- Duct diameter no less than 4".
- UL and cUL listed for tub/shower enclosure when used with GFCI branch circuit wiring.

DC Motor Technology

- Built in soft start function to increase bearings life.
- Automatically powers OFF when impeller is locked abnormally.

Specifications

VFB080C4L1	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	80	66
Sones	0.8	1.0
Power Consumption (Watts)	8.7	9.7
Energy Efficiency (CFM/Watt)	9.2	6.8
Speed (RPM)	1031	1226
Current (Amps)	0.07 @ 120 Vac	
Power Rating (V/Hz)	120 / 60	
Lamp (Watts)	26	