GENERAL

Molded with up to 80% natural quartz and high performance acrylic resins. E-Granite is non-porous and resists staining. E-Granite is hard enough to resist scratches and chips, is naturally sound deadened, and heat resistant. The color is solid throughout the sink and is UV resistant to prevent color-fading in indoor applications. Top mount.

DESIGN FEATURES

Bowl Depth: 9-1/2" (241mm).
Rim Height: 3/8" (10mm).
Aqua Divide Height: 4" (102mm)
Color Options with natural accents: Black (BK), Bisque (BQ), Dusk Gray (GY), Mocha (MC), or White (WH).

OTHER

Drain Opening: 3-1/2" (89mm).
Note: Faucet holes are pre-scored for flexible installation.
Installer can punch up to 5 faucet holes.
Sink complies with CSA B45.5 / IAPMO Z124

Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.

OPTIONAL ACCESSORIES

Bottom Grids: LKWOBG1417LSS (left bowl), LKWOBG1417RSS (right bowl)
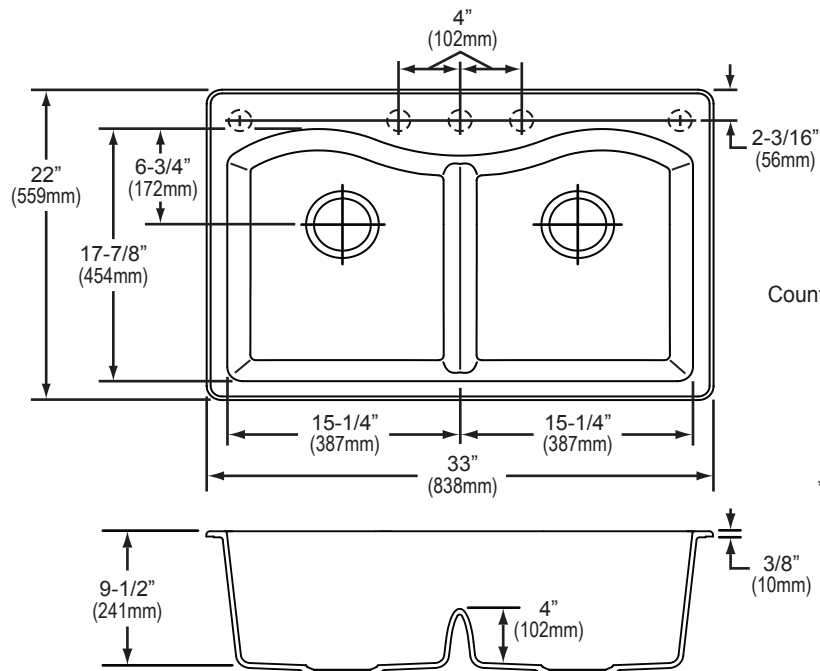Cutting Board: LKCB1417HW
Drains: LKD35, LKS35

Model ELGLB3322
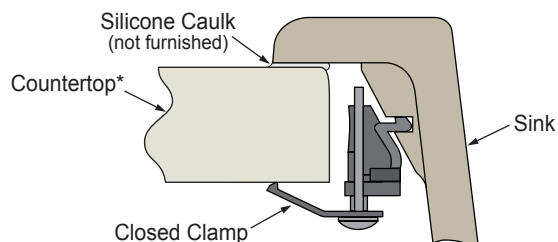
SINK DIMENSIONS*

Model Number	Overall		Inside Each Bowl			Cutout in Countertop 1" (25mm) Radius Corners		No. of Pre-scored 1-1/2" (38mm) Dia. Faucet Holes	Minimum Cabinet Size
	L	W	L	W	D	L	W		
ELGLB3322	33 (838mm)	22 (559mm)	15-1/4 (387mm)	17-7/8 (454mm)	9-1/2 (241mm)	32-3/8 (619mm)	21-3/8 (543mm)	5	36 (914mm)

*Length is left to right. Width is front to back.
**Template 0000001442 is available on Elkay.com or by contacting customer service.

4"
(102mm)

22"
(559mm)

6-3/4"
(172mm)

17-7/8"
(454mm)

2-3/16"
(56mm)

15-1/4"
(387mm)

15-1/4"
(387mm)

33"
(838mm)

9-1/2"
(241mm)

4"
(102mm)

3/8"
(10mm)

Top Mount Installation Profile

Silicone Caulk
(not furnished)

Countertop*

Sink

Closed Clamp

*Maximum thickness for use of hold down system is 1-3/4" (44mm).

Elkay
elkay.com

2222 Camden Court
Oak Brook, IL 60523

© 2015 Elkay
(Rev. 07/15) 1-329