

Lafayette Grip  
Part # UL 3314

- Additional Dimensions:** (Part # UL 3314)
- Exterior Projection is 3 1/8"
  - Interior Projection Depends on Handle Style
  - Overall Grip thickness: 1 1/2"
  - Clearance between door & grip is 1 1/4"
  - Plates thickness: 1/2"

**Same dimensions for dummy function**



San Carlos Grip  
Part # UL 3315


Normandy Grip  
Part # UL 3316

- Additional Dimensions:** (Part # UL 3315)
- Exterior Projection is 3 1/2"
  - Interior Projection Depends on Handle Style
  - Overall Grip thickness: 3/4"
  - Clearance between door & grip is 2"
  - Plates thickness: 1/2"

**Same dimensions for dummy function**

- Additional Dimensions:** (Part # UL 3316)
- Exterior Projection is 3"
  - Interior Projection Depends on Handle Style
  - Overall Grip thickness: 1"
  - Clearance between door & grip is 1 5/8"
  - Plates thickness: 1/2"

**Same dimensions for dummy function**

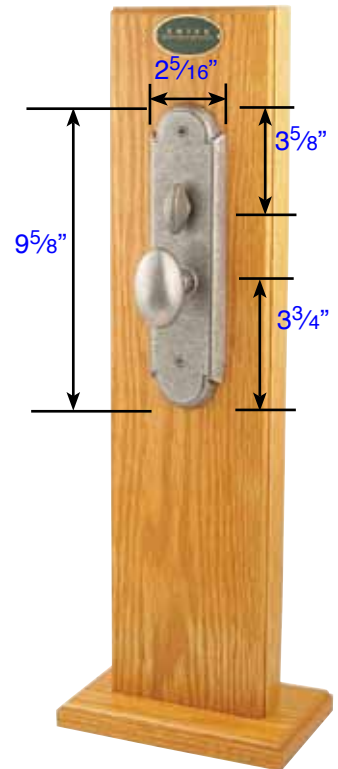

Standard interior trim  
Part # UL 3314/3315/3316\*

**\* Available in Lever By Lever/ Knob by Knob Mortise Entrance Handlesets. Same dimensions as interior trim of standard mortise entrance handlesets.**

**Door Thickness Specifications**

**Standard Door Thickness: 1 3/4"**

- Standard Components:
- 1 3/8" Threaded Cylinder
  - 2" Long Spindle
  - 2" Top Rosette Screw
  - 1 1/2" Bottom Rosette Screw
  - Thumbpress
  - Strikeplate

**Extended Door Thickness: 1 7/8" - 2 1/4"**

- Extended Components:
- 1 1/2" Threaded Cylinder
  - 2" Long Spindle
  - 2 1/2" Top Rosette Screw
  - 2" Bottom Rosette Screw
  - Thumbpress
  - Strikeplate

**Extended Door Thickness: 2 3/8" - 2 5/8"**

- Extended Components:
- 1 3/4" Threaded Cylinder
  - 2 1/4" Long Spindle
  - 2 1/2" Top Rosette Screw
  - 2" Bottom Rosette Screw
  - Extended Thumbpress
  - Extended Strikeplate
  - **2 3/4" TD Requires 2" Threaded Cylinder**