





**TE116ALED**


Available Options:



-01 Black/Black



-02 White/Black



-22 White/White



-0N Platinum/Black



Available Housing (Sold Separately):




**24056-014 - New Construction Plate**





**24076-012 - Insulated Ceiling Box**

Average Beam Angle (50%) : 13.1 Deg

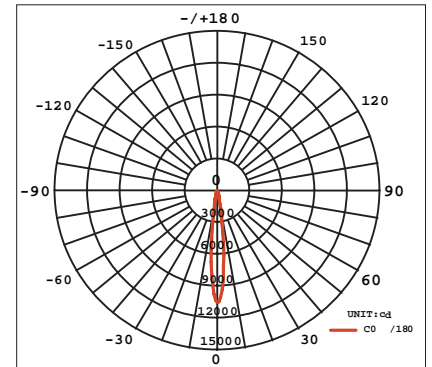

Luminous Intensity Distribution

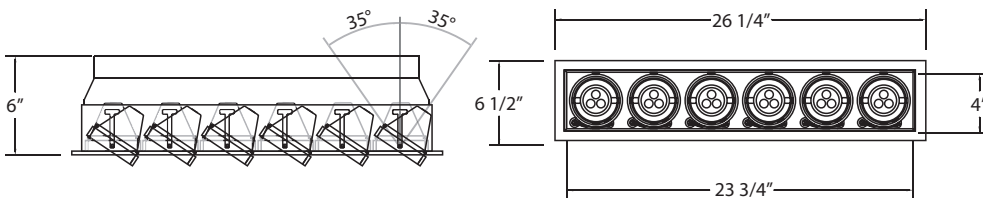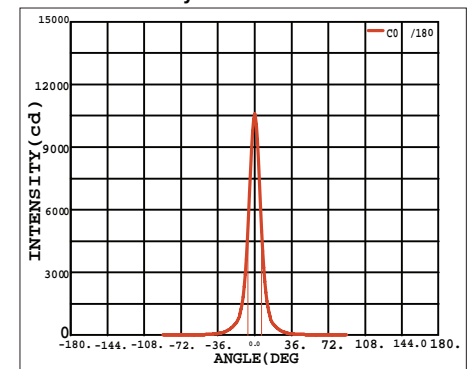

Fixture	Model #	Application	Lumen	LED Kelvin	LED Life	CRI	Cut Hole	Length	Width	Height	Lamping / Wattage
	TE116ALED	Remodel (Non IC)	2280	3500	50,000 (h)	85+	25 1/4" x 5 1/8"	26 1/4"	6 1/2"	6"	<b>6 X 9W LED OSRAM DIMMABLE DRIVER AVAILABLE</b>

Housing	Model #	Application	Cut Hole	Length	Width	Height
	24056-014	NEW CONSTRUCTION PLATE	25 1/4" x 5 1/8"	29 1/4"	9 1/4"	1 3/8"
	24076-012	INSULATED CEILING BOX	25 1/4" x 5 1/8"	37 1/2"	12 3/4"	11 1/2"

