


IL SERIES - INTERCONNECTED GRADE 2 LOCK

EZSET
by DELANEY.

DIMENSIONS

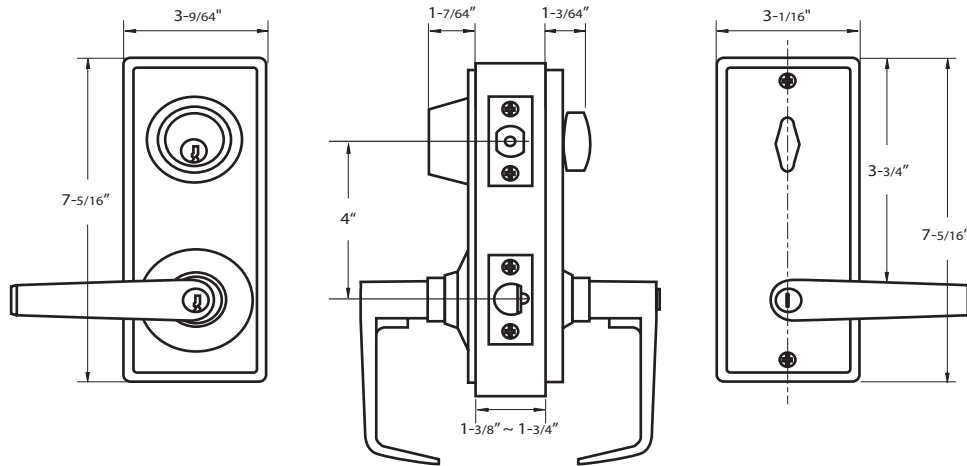

STANDARD SPECIFICATIONS



LISTED



Door Prep	Cross bore: 2-1/8" Edge bore: 1" Entry/Pass. Latch face: 2-3/4": 1-1/8" x 2-1/4" 2-3/8": 1" x 2-1/4" Deadbolt Latch face: 1" x 2-1/4"	Latches	Entrance: 2-3/4" (E9070T) standard. 2-3/8" (E9060T) optional Passage: 2-3/4" (E9073T) standard. 2-3/8" (E9063T) optional Faceplate: 2-3/4": 1-1/8" x 2-1/4". 2-3/8": 1" x 2-1/4" Sq. Corner Bolt: 1/2" throw. Meets 3-Hr. Fire Rating
Backset	2-3/4" UL standard. 2-3/8" optional		Deadbolt: 2-3/8" and 2-3/4" adjustable (9091 UL)
Door Thickness	1-3/8" ~ 1-3/4" door standard		Faceplate: 1" x 2-1/4" square corner Bolt: Full 1" throw. Meets 3-Hr. Fire Rating
Cylinder	SC4 6-pin standard. KW1 5-pin optional Entries packed KA2	Strikes	1-1/8" x 2-3/4" T-strike (9106) & Deadbolt Strike (9111)
ANSI Standards	Meets requirements of ANSI A156.2 Series 4000, GR2, 400,000 Cycles.	Door Handing	Not Required
		Product Features	- Interconnected function - Panic Proof 4" O.C. bore spacing

PRICING

Model	Function	WT/LB	CTN QTY		US15	US10B
300 - IL	Entrance	45 Lbs	10 Pcs	Item No.	380002	380010
				List Price		
301 - IL	Passage	45 Lbs	10 Pcs	Item No.	381002	381010
				List Price		

Call for additional lever style availability & pricing.

FUNCTIONS

See Function Guide on Page F-14.



THE DELANEY CO.

Copyright © THE DELANEY CO. All rights reserved.

Effective 10/1/2010