Stilo Isola Island Hood



A European styled island canopy in kitchen range hoods









The Stilo Isola features a streamlined shape combined with traditional styling making the range hood a stunning alternative in canopy island ventilation. With advanced LED controls the Stilo Isola delivers.

Model #	Size Color	Performance Range	Sound Levels
STILIS36SS	36 x 26 Stainless	160 - 600 CFM	3.5 - 6.5 sones
STILIS48SS	48 x 26 Stainless	160 - 600 CFM	3.5 - 6.5 sones





Feature Chart				
Min. / Max. Ceiling Height	7' 10 3/8" - 8' 11 3/8"			
Canopy Depth / Height	26 5/8" D / 2 3/8" H			
High Ceiling Kit	Yes - up to 10' 8 3/8"			
Convertible to Ductless / Recirculating	Yes - ductless kit needed			
Controls	3 speed LED digital control			
Lighting	4 X 20 (W) Halogen + Dimmer			
Ducting Top	6" Round			
Grease Filters	dishwasher safe baffle filters			
Quick Island Mounting	Yes			
Pro Motor with Metal Impellers	Yes			
30 minute auto shut off	Yes			
Silent Kit	Yes			
10 Minute Intensive Speed	Yes			
AC Input / AC Power	120 V - 60 hz / Max 410 W at 3.5 A			
Annual Electricty Costs	\$7.05 / Year *			

^{*} Note – ran 30 minutes a day on low speed with the lights on, 365 days, using the North American average of 12.2 cents per kWh. p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

Dimensional Diagrams

(see installation instructions for more information)



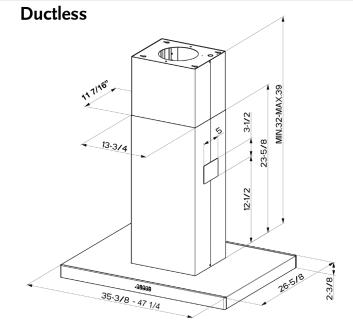

min & max ceiling height examples

x = range hood height above cook top

ducted / ductless

 For higher ceiling installations, the High Ceiling Chimney Kit includes an additional support structure which adds 21" to the various ceiling heights in the figures above.

ACCESSORIES

High Ceiling Chimney Kit # HIGH2

Extends the island chimney for high ceilings



Replacement Charcoal Filter # FILTER2

For ductless installations, high quality, heavy duty filters ensure the removal of smoke and odors from the kitchen.



Ductless Conversion Kit # DUCT2

Includes: • Lower Chimney with holes for ducting • Ductless Diverter Assembly • Vent Grates • Charcoal Filter



CFM Reducer Kit For use in make up air

For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300



















CFMRED