

The Kubix™

FP4420 Series



SPECIFICATION SHEET




celebrating 25 years

Product Specifications Subject To Change

KUBIX™

FP4420** Ceiling Fan

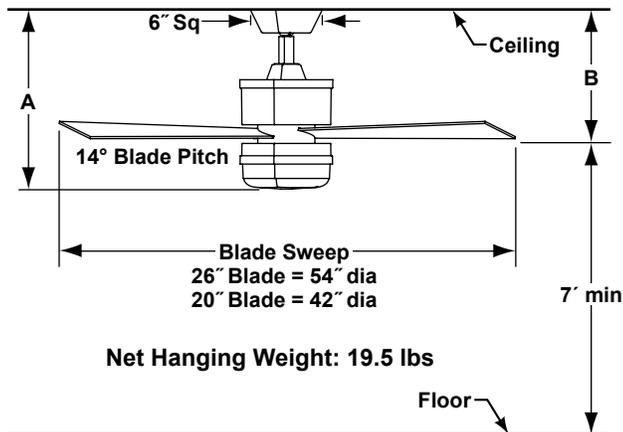

	A	B
Fan w/6" downrod	19.25"	14.50"
Fan w/12" downrod	25.25"	20.50"
Fan w/18" downrod	31.25"	26.50"
Fan w/24" downrod	37.25"	32.50"
Fan w/36" downrod	49.25"	44.50"
Fan w/48" downrod	61.25"	56.50"
Fan w/60" downrod	73.25"	68.50"
Fan w/72" downrod	85.25"	80.50"

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

BLADES:

A set of three 26" reversible, cherry/walnut, wood blades is included. Optional sets of three 20" wood blades are available in reversible cherry/walnut (B4442CWR) and satin nickel (B4442SN) finishes—sold separately. Optional sets of three 20" composite blades are available in cherry (BPW4442CY) and walnut (BPW4442WA) finishes—sold separately.

CONTROL OPTIONS:

C24 hand-held remote control with canopy-style receiver unit (RECAN355) is included. Frequency code settings are located in both transmitter and receiver units. Push button remote control has 3 fan speeds, infinite light levels and off button. Reversing switch located on fan housing. Optional C25 wall control is available—sold separately. Instructions are provided with each control.

LIGHTING OPTION:

2-bulb downlight fixture with two 60-watt candelabra bulbs is included. Maximum downlight wattage is not to exceed 120 watts.

DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6) and square downrod sleeve. Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only. Damp location rated if used with composite blades listed above.

Available Finishes

OB	Oil-rubbed bronze with opal frosted Glass
SN	Satin nickel with opal frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	138	4565	83	0.47	55
Med	89	2805	110	0.37	25
Low	58	1647	129	0.28	13



celebrating 25 years

10983 Bennett Parkway

Zionsville, IN 46077

Toll Free (888) 567-2055

FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website @ www.fanimation.com

*Copyright 2010 Fanimation, Inc.
All Rights Reserved*



2010/01