

# **The Zonix™**

## **FP4620 Series**




# **SPECIFICATION SHEET**



*Product Specifications Subject To Change*

**ZONIX™**

# FP4620\*\* / FP4630SN Ceiling Fan

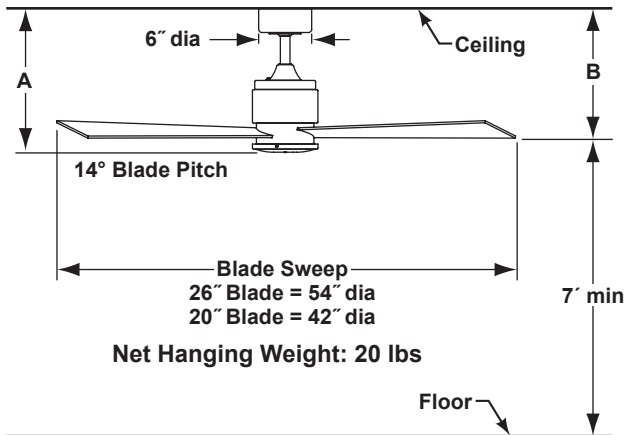

	A	B
Fan w/6" downrod	15.40"	12.90"
Fan w/12" downrod	21.40"	18.90"
Fan w/18" downrod	27.40"	24.90"
Fan w/24" downrod	33.40"	30.90"
Fan w/36" downrod	45.40"	42.90"
Fan w/48" downrod	57.40"	54.90"
Fan w/60" downrod	69.40"	66.90"
Fan w/72" downrod	81.40"	78.90"

### Available Finishes

OB	Oil-rubbed bronze—reversible cherry/walnut
PN	Polished Nickel—reversible cherry/walnut
SN	Satin nickel—reversible cherry/walnut (FP4620**)
SN	Satin nickel—satin nickel (FP4630SN)

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

### BLADES:

A set of three 26" blades is included; reversible cherry walnut for FP4620\*\* and satin nickel for FP4630SN. Optional sets of three 20" wood blades are available in reversible cherry/walnut (B4442CWR) and satin nickel (B4442SN) finishes—sold separately. Optional sets of three 20" composite blades are available in cherry (BPW4442CY) and walnut (BPW4442WA) finishes—sold separately.

### CONTROL OPTIONS:

CW40 fan-only wall control is included. Reversing switch located on fan housing. Instructions are provided with each control. Optional C2 wall control and C4 hand-held remote with receiver are available—sold separately.

### LIGHTING OPTION:

A single-bulb downlight fixture with 13 watt, energy-efficient CFL bulb included is available—sold separately. Maximum downlight wattage not to exceed 13 watts. *NOTE: Fan supplied with fan only wall control. Light kit will require use of C25\* wall control and/or C4FL hand-held remote control with receiver unit—sold separately.*

\*C25 wall control must be used with C4FL remote control

### DOWNROD OPTIONS:

Fan comes with a 1" dia. x 6" long downrod (DR1-6). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry locations only, however, is damp location rated if used with composite blades listed above.

### Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	145	4529	83	0.45	55
H-Med	99	2987	108	0.32	28
L-Med	70	2008	133	0.23	15
Low	49	992	126	0.17	8



celebrating 25 years

**10983 Bennett Parkway  
Zionsville, IN 46077**

**Toll Free (888) 567-2055**

**FAX (866) 482-5215**

**Outside U.S. call (317) 733-4113**

**Visit Our Website @ [www.fanimation.com](http://www.fanimation.com)**

*Copyright 2010 Fanimation, Inc.  
All Rights Reserved*



2010/01