

Treventi[®]

FP2500 / LX25 Series



Select Finishes


SPECIFICATION SHEET



celebrating 25 years

Product Specifications subject to change

Treventi® Fan Assembly – FP2500**

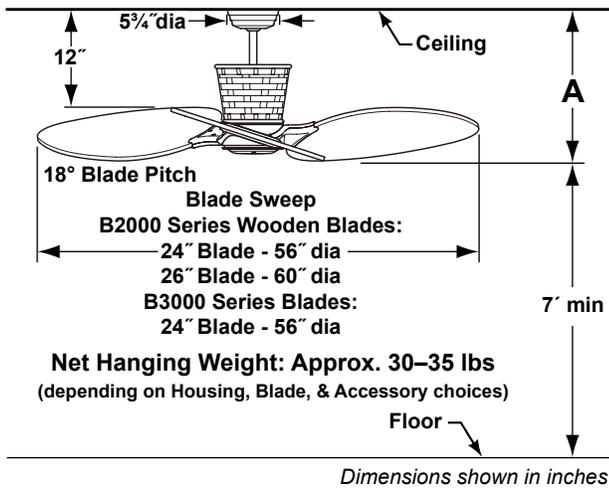

**Available Finishes	
BL	Black (Damp)
PW	Pewter
RS	Rust (Damp)

Distance from Ceiling to Edge of Blade	A
Fan w/7" downrod	18"
Fan w/12" downrod	23"
Fan w/18" downrod	29"
Fan w/24" downrod	35"
Fan w/36" downrod	47"
Fan w/48" downrod	59"
Fan w/60" downrod	71"
Fan w/72" downrod	83"

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	129	5619	66	0.71	85
Med	81	3352	91	0.45	37
Low	51	1944	114	0.30	17

INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

FK2100 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

HOUSING ASSEMBLY (HA25**):

Motor housings are available in a variety of styles, materials and finishes to fit your decor—sold separately. See our catalog or visit www.fanimation.com for housing options.

BLADES:

Fan uses B2000 & B3000 Series Blades—sold separately. See our catalog or visit www.fanimation.com for blade options.

CONTROL OPTIONS:

C22 hand-held remote control and C23 wall control (white faceplate included) with receiver unit (P2550) are included. Push button control has 3 speeds, reverse, up/down light controls and off button. C2-220 wall control is included with 220V models. Instructions are provided with each control.

LIGHTING OPTIONS:

3-bulb decorative upright fixture with three 40-watt candelabra bulbs is included. Optional LK25 side-light kit is available (bulbs included). Optional downlight fitters and light kits are also available. Maximum wattage including upright, sidelight and downlight not to exceed 300 watts. See our catalog or visit www.fanimation.com for all available lighting options.

DOWNROD OPTIONS:

Fan comes with a 1/2" dia. x 7" long downrod (DR7). Optional downrods are available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 7" downrod. Optional sloped ceiling ball kits (SCB52) are available for slope angles greater than 30° and up to 52°. Call technical support for more information.

LOCATION USE:

Fan is dry location rated only, except where (Damp) is noted next to above listed finish codes.


Uni-Packed Ceiling Fan Assembly – LX25**

General Specs (see page 56 for more detailed spec information)	
Electrical Requirements	120 VAC, 60 Hz, 15 amp circuit (220 VAC, 50 Hz export version available)
Blade Sweep / Pitch	56" / 18°
Dimension (w/7" DR)	18" from ceiling to blade edge
Fan Controls	Remote & wall controls
Built-in Decorative Uplight (bulbs included)	3 40-watt candelabra
Down Light Kit / Glass	Optional—sold separately
Net Hanging Weight	30 – 35 lbs



LX25IM—Unpacked Fan	
Fan / Housing / Blade Assembly	Description
Motor Assembly and Blade Holders	Rust
Motor Housing (Side-Light Kit Adaptable)	Islamorada®
Blades (A set of 3)	B2070CP cairo purple wood

Fan is rated for dry locations only

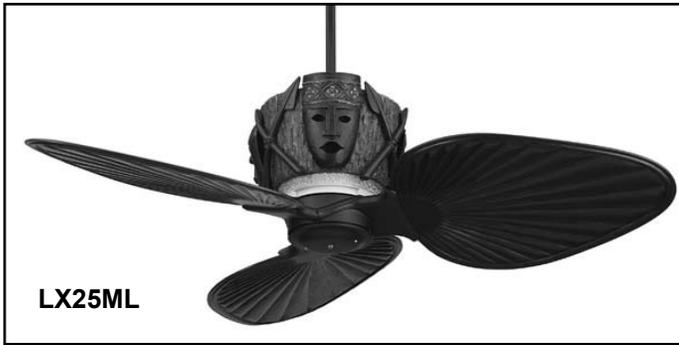

LX25ML—Unpacked Fan	
Fan / Housing / Blade Assembly	Description
Motor Assembly and Blade Holders	Black
Motor Housing (Side-Light Kit Adaptable)	Malawi®
Blades (A set of 3)	B2040BL black carved wood


Fan is rated for dry locations only



LX25PW—Unpacked Fan	
Fan / Housing / Blade Assembly	Description
Motor Assembly and Blade Holders	Pewter
Motor Housing	Amalfi® – Pewter
Blades (A set of 3)	B2070CP cairo purple wood

Fan is rated for dry locations only

Uni-Packed Ceiling Fan Assembly – LX25**

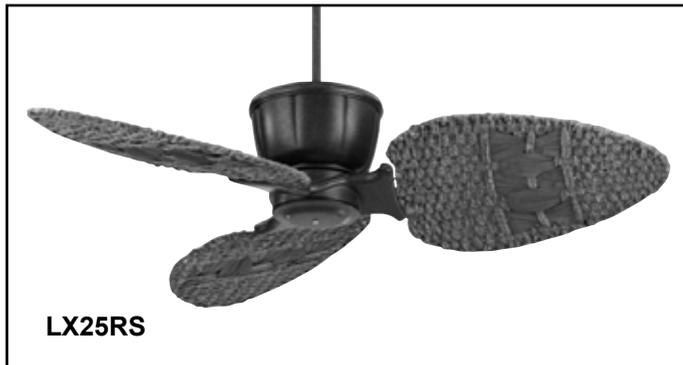

LX25RS—Unpacked Fan	
Fan / Housing / Blade Assembly	Description
Motor Assembly and Blade Holders	Rust (Damp)
Motor Housing	Amalfi® – Rust
Blades (A set of 3)	B3000IM brown wicker weave

Fan is rated for dry and damp locations



LX25ZB—Unpacked Fan	
Fan / Housing / Blade Assembly	Description
Motor Assembly and Blade Holders	Black
Motor Housing (Side-Light Kit Adaptable)	Zanzibar®
Blades (A set of 3)	B2040BL black carved wood

Fan is rated for dry locations only