



Fixture Name: Lancaster 6005-1W PW/RBZ/AB

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

| PARTS LIST | | Company Name: _____ Co. Account #: _____ | |
|--|---|--|---|
| below to be filled out by retailer | | | |
| Mounting strap 1ea 3/4" X 4" |  | Threaded rod (Nipple) 1ea 3/8 X 40mm |  |
| Mounting screw 2ea 8/32 X 1" |  | Hex nut 1ea 3/8 X 3mm |  |
| Spring washer 1ea 15 X 3mm |  | Deco nut (round nut) 2ea 15 X 12mm |  |
| Green Ground screw 1ea 8/32" X 10mm |  | Wire connector 3ea P2 Orange |  |
| Socket Ring (PW, RBZ only) 1ea 50 X 9mm |  | | |
| Socket Ring (AB only) 1ea 51 X 23mm |  | | |
| Part Needed _____ | | Quantity _____ | |
| Part Needed _____ | | Quantity _____ | |
| Reason why _____ | (missing, scratched, broken glass, bent, bad finish) | | |
| Comments _____ | | | |

FIXTURE ASSEMBLY INSTRUCTIONS


Read and review installation instruction sheet before assembling the fixture.

1. Slide the Glass Shade (K) over Socket (M). Secure Glass Shade (K) by threading the Socket Ring (L) onto the Socket (M) until tight.

2. Install the light bulb in accordance with the fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

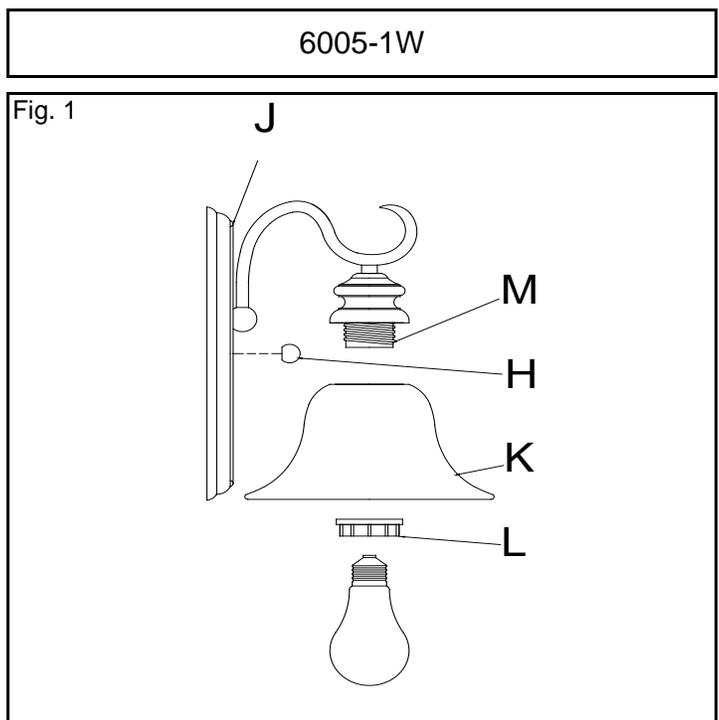

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

HANGING THE FIXTURE (Fig. 1)

- Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
- Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
- Take Threaded Rod (D) from parts bag and thread into center screw hole on Mounting Strap (A). Tighten with Hex Nut (B) and Spring Washer (C).
- Attach the Mounting Strap (A) to the Junction Box (I) using the two Mounting Screws (E). Tighten the screws securely.

CONNECTING THE WIRES (Fig. 2)

- Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).

NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.

- Attach the GROUND wire (GREEN or COPPER) from the junction box and the fixture ground wire to the green ground screw on the Mounting Bracket (A). Or connect both wires together using a wire connector.
- Tuck these wire connections neatly into the Junction Box.

FINISHING THE INSTALLATION (Fig. 3)

- Place the fixture Back Plate (J) over the Threaded Rod (D), so it protrudes through the hole in the Back Plate (J).
- Thread the Deco Nut (H) onto the Threaded Rod (D) and continue turning until the Back Plate (J) is snug against the wall.
- Install glass according to the fixture assembly instructions.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING)
YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

JUNCTION BOX

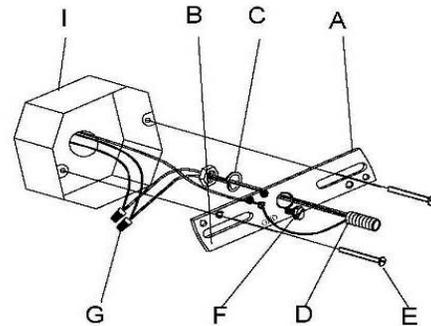


Fig. 2

WIRE CONNECTOR

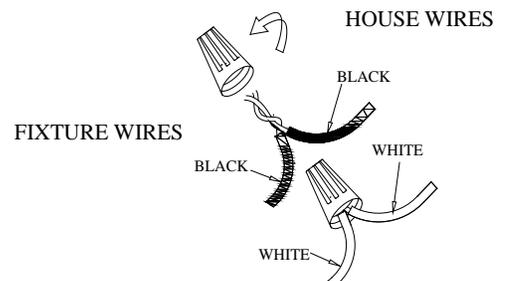


Fig. 3

