










**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

<b>PARTS LIST</b>		Company Name: _____ Co. Account #: _____ below to be filled out by retailer	
Mounting Strap 1ea 4" X 3" 	Junction Box Screw 2ea 8/32" X 1" 	Mounting Screw 2ea 5/32" X 28mm 	
Wire Connector 2ea P2 Orange 	Hex Nut 2ea 5/32" X 3.5mm 	Deco Nut (round nut) 2ea 9 X 9.5mm 	
Green Ground Screw 1ea 8/32" X 10mm 	Socket Ring (AB only) 2ea 51 x 23mm 	Socket Ring (PW, RBZ only) 2ea 50 x 9mm 	
Part Needed _____	Quantity _____		
Part Needed _____	Quantity _____		
Reason why _____ (missing, scratched, broken glass, bent, bad finish)	Comments _____		

## FIXTURE ASSEMBLY INSTRUCTIONS


**Read and review installation instruction sheet before assembling the fixture.**

1. Slide the Glass Shade (H) over Socket (I). Secure Glass Shade (H) by threading the Socket Ring (J) on to Socket (I) until tight.  
Repeat for remaining glass shade.

2. Install light bulbs in accordance with fixture's specifications.

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**

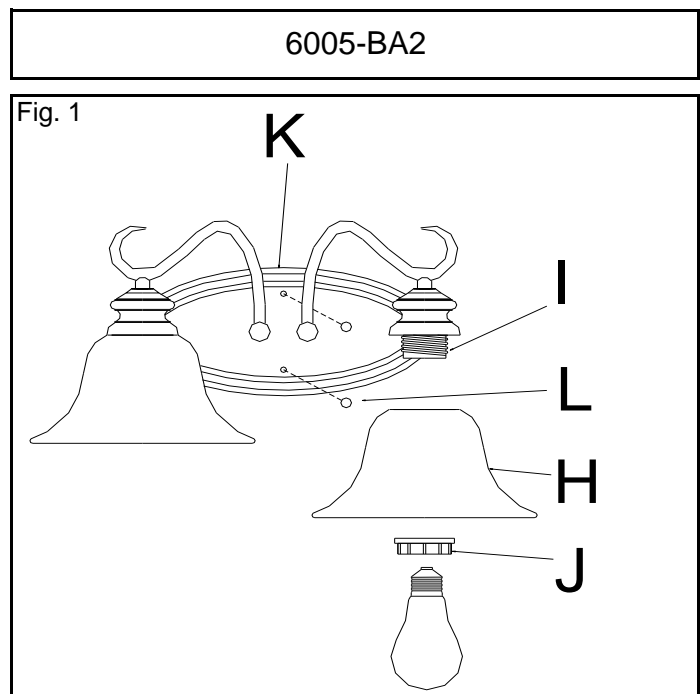

For Customer Service, contact the place of purchase to arrange for replacement parts.

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (A) contains several pairs of threaded holes. Find the pair of holes that match the hole spacing in your fixture Back Plate (K). Thread the two Mounting Screws (B) halfway into the Mounting Strap (A).
4. Place the Mounting Strap (A) over the Junction Box (E) so the Mounting Screws (B) are horizontal.
5. Attach the Mounting Strap (A) to the Junction Box (E) by using the two mounting screws (D). Tighten the screws securely.

### CONNECTING THE WIRES (Fig. 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Attach the GROUND wire (GREEN or COPPER) from the junction box and the fixture ground wire to the green ground screw on the Mounting Bracket (A). Or, connect both wires together using a wire connector.
  8. Tuck these wire connections neatly into the junction box.

### FINISHING THE INSTALLATION (Fig. 3)

9. Place the fixture Back Plate (K), over the Mounting Screws (B), so they protrude through the holes in the Back Plate (K).
10. Thread the Deco Nuts (L) onto the Mounting Screws (B) and continue turning until the Back Plate (K) is snug against the wall.
11. Install glass according to the fixture assembly instructions.

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

Fig. 1

## JUNCTION BOX

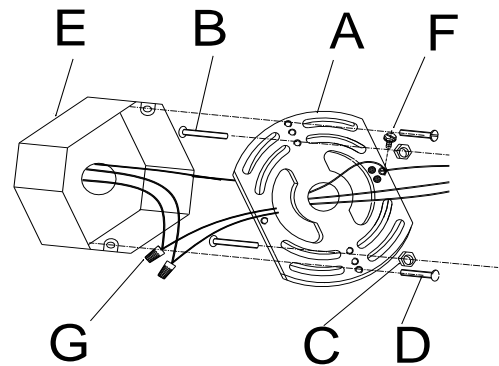


Fig. 2

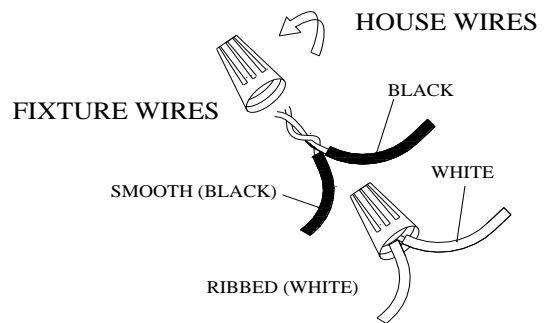


Fig. 3

