



## 3800 Series

**Description:** Mortise Deadbolts > 3800 Series Grade 1 Deadbolt

**Application:** Heavy duty commercial, industrial, institutional




Standard Door Prep	- 6-3/4" x 4-1/2" x 1" (171 mm x 114 mm x 25 mm)
Certifications	- BHMA Certified ANSI A156.13, Series 1000, Grade 1, Operational and Security - ADA Compliant ANSI A117.1 Accessibility Code - UL/cUL Listed for all functions up to 3 hours for "A" label single doors - UL10C/UBC 7-2 (1997) Positive Pressure Rated - UL10B Negative Pressure Rated
Exposed Trim	- Forged brass or cast stainless steel
Lock Case	- 4-5/16" x 6" x 1" (110 mm x 152 mm x 25 mm)
Armor Front	- 1-1/4" x 8" x 7/32" (32 mm x 203 mm x 5 mm) (standard) - 1-1/16" x 8" x 7/32" (27 mm x 203 mm x 5 mm) (optional)
Keys	- Two brass keys per lock
Cylinder	- Brass 6-pin - Keyed different - C keyway  - Other keying options available from factory - Interchangeable core - Brass 6- or 7-pin sold separately

Door Thickness	- 1-3/8" (35 mm) - 2-1/2" (64 mm) steel door - 1-3/4" (45 mm) - 2-1/2" (64 mm) wood door
Backset	- 2-3/4" (70 mm) only
Deadbolt	- 1" (25 mm) throw, stainless steel
Strike	- 3991 1-1/4" x 4-7/8" (32 mm x 124 mm) No lip standard
Fasteners	- Thru-bolted trim concealed under rose
Finishes	- US3, US4, US10, US10B, US26, US26D - US3, US4, US10, US10B, and US26 may be subject to extended lead times. Please consult factory.
Function	- 60 - CylX Thumbturn DB 62 - Double Cylinder DB 63 - Classroom DB 64 - Cylinder DB
Notes	- Self-adjusting case for beveled doors - Double cylinder locks on residences and any door in any structure that is used for egress are a life safety hazard in times of emergency. Their use is not recommended. Installation should be in accordance with exiting codes only.



**3800 SERIES DEADLOCKS HOW TO ORDER**

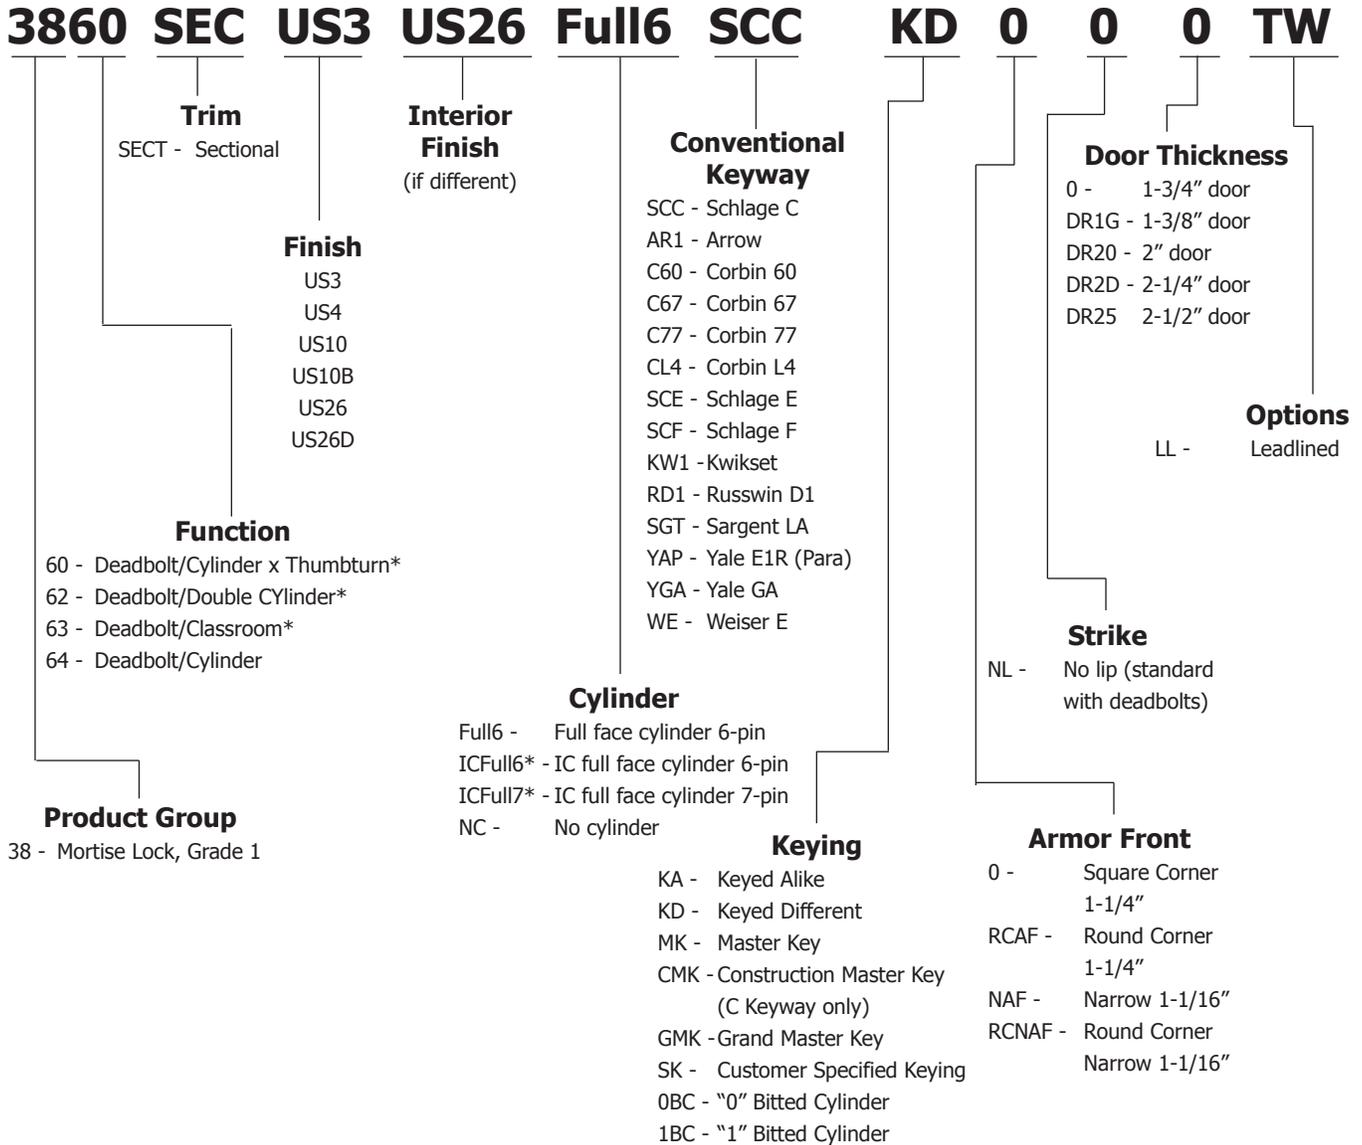

**Notes:**

- If master-keyed, include master key instruction sheet with order (available in catalog or online).
- Finishes other than US26D and US32D may require extended lead times.
- CMK, 0-bitted, and 1-bitted are only available in conventional cores.

\* Small format interchangeable core sold separately. Available in Best Keyways only, A Standard.

Ordering example 3680 SECT 26D ICFULL6 NC