


Product Features

- Thermostatic temperature control, 2-way diverter, and volume control in one unit
- Single hole installation
- Includes both rough and trim
- High temperature limit stop may be reset to comply with local plumbing codes
- Max. flow rate 8 gpm @ 44 psi

Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO

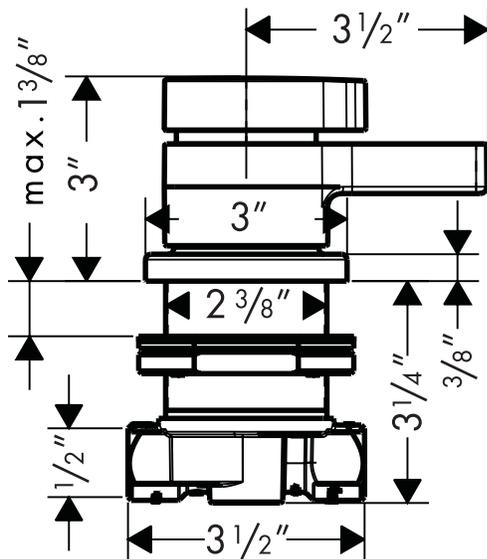

Available Finishes

Chrome	06401000
Brushed Nickel	06401820

Optional Accessories

Tub spout and rough	06402XX0
Metal hose pull-out set	06438XX0
Handshower – many styles available	

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 5/2008