

Motion Activated SECURITY LIGHTING

Heath®/Zenith

SPECIFICATION SHEET

Model # **SL-5412**



Available Colors: White (SL-5412-WH) and Bronze (SL-5412-BZ)

SPECIFICATIONS

Power Supply

- 120VAC, 60 Hz

Wires

- AWG#18 (UL Recognized)

Max Load

- Up to 300 Watts Maximum Incandescent or
Up to 60 Watts Maximum PAR 38 dimmable
self-ballasted CFL (SBCFL)

Range

- Up to 70 Feet

Operating Modes

- TEST, AUTO, MANUAL

ON-Timer

- TEST, 1, 5, 10 Minutes

Features

- 180° motion detection angle
- Selectable on-time from 1, 5, or 10 minutes
- Adjustable sensitivity
- 2 Year Warranty

Applications

- Corners of a house or other building
- Wall or eave mounted

Operating Modes

TEST: Overrides the photocell to allow the light to be setup during daylight hours.

AUTO: Lights automatically come on when motion is detected.

MANUAL: Lights stay on full bright until dawn. Photocell then resets light to AUTO mode.

ON-Timer

Turns lights on full bright when motion is detected.

There are 4 preset selections for the amount of time the lights stay on: Test (5 seconds), 1, 5, 10 minutes.

Adjustable Sensitivity

You can adjust the motion sensor's sensitivity to movement of heat.



Meets the ENERGY STAR® guidelines when used with 120 W Max bulbs.

JOB #

JOB NAME


HeathCo™

2445 Nashville Road
P.O. Box 90045
Bowling Green, KY 42102-9045


Tech Service (800) 858-8501
Sales (270) 846-8400
Fax (270) 846-8501

www.heath-zenith.com


USAGE & COVERAGE

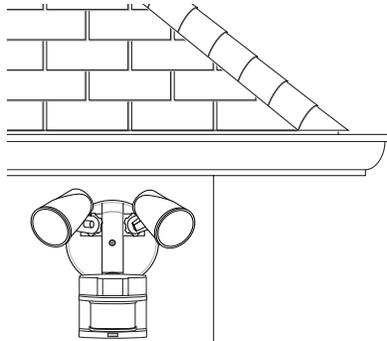




WALL MOUNT

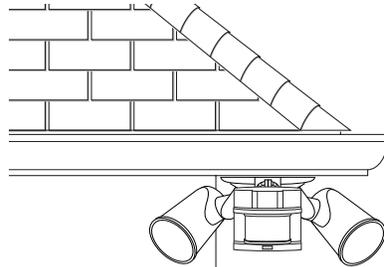

EAVE MOUNT

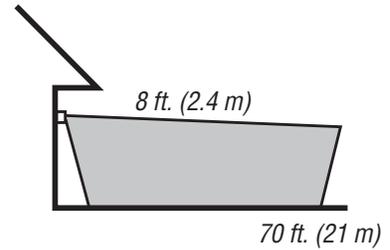

MAXIMUM RANGE

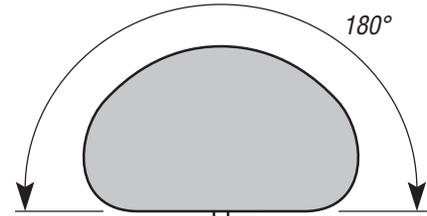

MAXIMUM COVERAGE ANGLE (TOP VIEW)



Meets the ENERGY STAR® guidelines when used with 120 W Max bulbs.

WIRING

! WARNING: Turn power off at the circuit breaker before wiring.

