




Family: Easton | Item No. 3985 PL



Drawing 1 - Assembly



Drawing 2 - Glass Installation

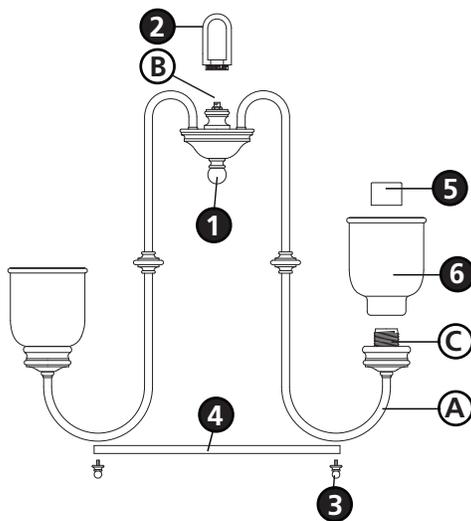

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first assembling the main body of the fixture, making all necessary electrical connections, hanging the fixture from the ceiling, and then installing the glass.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

2

1. Slip loop (2) along wire and thread onto threaded tube (B) located on the top of the main body assembly (1).
2. Spread arms (A) located on the main body assembly (1), until they are equally spaced 72 degrees apart - see **Drawings 1 & 2**.
3. Remove decorative ball knob studs (3) from back of arms (A).
4. Attach ring (4) to back of arm (A) using ball knob studs (3) removed earlier.
5. Please refer to the hanging instruction sheet (I.S. 19-90) provided to hang fixture. Then refer back to this sheet to install glass.

3

1. To install glass, remove socket ring (5) from socket (C) - see **Drawing 2**.
2. Slip glass (6) over socket (C).
3. Thread socket ring (5) onto socket (C) to secure glass (3).
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 3985 fixture is 100 watts per bulb.

10.05.09