




Family: Avon | Item No. 5556 CM



**Drawing 1 - Strap Detail**

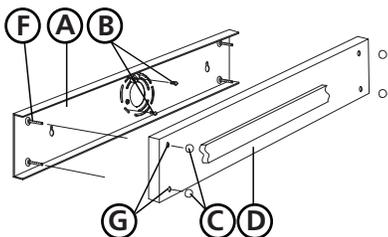

**Drawing 2 - Fixture Assembly**

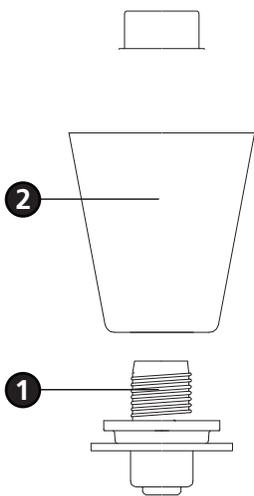

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first mounting the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall and then installing the fixture glass.**

**2**

1. Remove ball knobs **(C)** from fixture - see **Drawing 1**.
2. Remove retainer plate **(A)** from backplate **(D)**.
3. Attach retainer plate **(A)** to junction box using 2 screws **(B)**.
4. Additional screws (not provided) can be installed at points **(E)**.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to complete installation of this fixture.

**4**

1. Slip holes **(G)** in backplate **(D)** over screws **(F)** on retainer plate **(A)**.
2. Thread ball knobs **(C)** onto end of screws **(F)** and tighten to secure backplate to wall.

**5**

1. To install glass, remove threaded socket ring **(3)** from socket **(1)** - see **Drawing 2**.
2. Place glass **(2)** over exposed section of socket **(1)**.
3. Thread socket ring **(3)** onto socket **(1)** to secure glass **(2)**.
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 5556 fixture is 75 watts per bulb.

7.31.08