



Family: Stratford | Item No. 1352 AU/MB



Drawing 1 - Glass Replacement

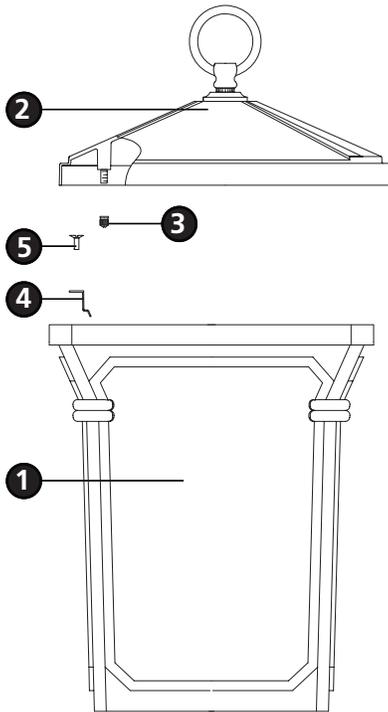

▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first making all necessary electrical connections, and then hanging the fixture from the ceiling.**

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer to the hanging instruction sheet **(I.S.)** provided to complete installation of this fixture.

2

Glass Replacement Instructions - see **Drawing 1**.

1. Remove roof **(2)** from cage **(1)** by unscrewing the 2 ball knobs **(3)** on inside of fixture.
2. Remove the 4 glass clips **(4)** by removing the screws **(5)** that hold them in place.
3. Pull up on glass and remove.
4. To replace the glass follow steps 1-3 in reverse order.

Note: Maximum wattage for 1352 fixture is 100 watts per bulb.

4.1.08