

# TECHNICAL SPECIFICATIONS



## Amiga® Whirlpool Bath

AMI7236 WRL 2XX Amiga Whirlpool Bath, Right Hand (N890)  
 AMI7236 WLR 2XX Amiga Whirlpool Bath, Left Hand (N888)

## Amiga® Bath

AMI7236 BUX XXX Amiga Soaker Bath (9180)

### INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## KEY DIMENSIONS

### DIMENSIONS

72" L x 36" W x 20-3/4" H  
 (1829) mm L x (914) mm W x (533) mm H

### DRAIN/OVERFLOW

A: 16-7/8" (429 mm) B: 14" (356 mm)

### CUTOUT

70" x 34"

### TOTAL WEIGHT

N890, N888: 781 lb. (334 kg) / 43 lb/sq. ft. (209 kg/m<sup>2</sup>)  
 9180: 738 lb. (335 kg) / 41 lb/sq. ft. (200 kg/m<sup>2</sup>)

### OPERATING GALLONAGE

Min. 42 U.S. Gal. (159 Liters)  
 Max. 78 U.S. Gal. (295 Liters)

### PRODUCT WEIGHT

N890, N888: 105 lb. (48 kg)  
 9180: 71 lb. (32 kg)

### SKIRT MOUNTING

Optional U-Frame: P/N F958

### ELECTRICAL SPECIFICATIONS MODELS N890, N888 ONLY

Requires a dedicated GFCI protected separate circuit.


Motor/Pump: 120 VAC, 15 AMP, 60 Hz.

RapidHeat™: 120 VAC, 15 AMP, 60 Hz.


## FEATURES, UPGRADES & ACCESSORIES

- Right and Left Hand Drain Location
- Accessories / Hardware:
  - Rotary Drain Kit, 26" Cable: #8730
  - TheraPro Jet Trim Kit: #GU44
  - AccuPro Jet Trim Kit: #GU45 (2 kits required)
- Trim Kit Finishes Available:
  - (827) – Chrome
  - (826) – Brushed Nickel
  - (845) – Oil Rubbed Bronze


HEATER (OPTIONAL) MODELS N890, N888 ONLY  
 Requires a dedicated GFCI protected separate circuit.  
 RapidHeat™: P/N S750000

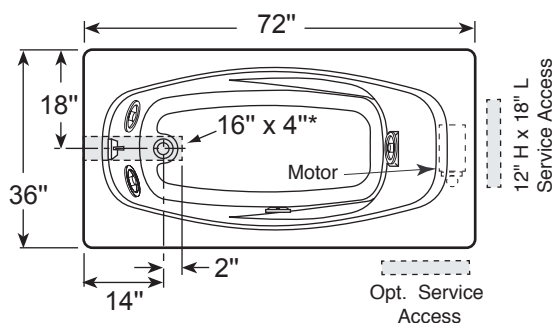


Product Shown: Amiga Whirlpool Bath Left Hand Shown  
 Model: N888  
 \* Measurements inside unit represent cutout in floor to allow for drain/overflow. Minimum Service Access dimensions given.

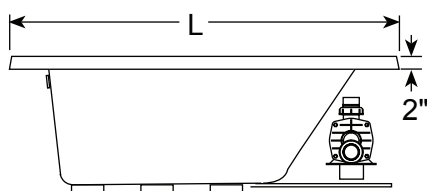

SIDE VIEW



END VIEW



DRAIN/OVERFLOW