



Features:


- Ceramic disc valve cartridge
- Low lead: meets NSF standard 61/Section 9 and Prop 65 lead requirements
- CA AB1953/VT Act 193 Compliant
- 8-7/8" Swivel Spout
- Spout swivels at 360°
- All metal Side Spray available
- Available with and without Side Spray
- Optional coverplate available separately

Pictured: 850/860 Single Lever Kitchen Faucet with Side Spray

Maximum Flow Rate: 2.2 GPM (8.3L/min)

	Handle Type	Product Number	
Single Lever Kitchen Faucet	Lever	850/800	E
Single Lever Kitchen Faucet with Side Spray	Lever	850/860	E
10" Cover Plate - 1-Hole		H960748	

Available Finishes:	Finish Code
Polished Chrome	100
Old Bronze	105
Brushed Nickel	144
UltraSteel (PVD)	355

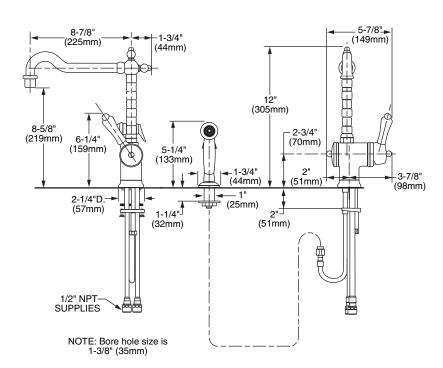

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



CODES & STANDARDS

These products meet and exceed the following codes and standards:

ASME A112.18.1 CSA B125 NSF 61/Section 9



