



Features:


- Ceramic disc valve cartridge
- Low lead: meets NSF standard 61/Section 9 and Prop 65 lead requirements
- CA AB1953/VT Act 193 Compliant
- 8-1/8" swivel spout
- Spout swivels at 360°
- Pull down spray with metal hose
- Two check valves
- Two-function hand spray

Maximum Flow Rate: 2.2 GPM (8.3L/min)

| | Handle Type | Product Number |
|---------------------------------------|-------------|----------------|
| Single Lever Pull Down Kitchen Faucet | Lever | 850/840 |



| Available Finishes: | Finish Code |
|---------------------|-------------|
| Polished Chrome | 100 |
| Old Bronze | 105 |
| Brushed Nickel | 144 |
| UltraSteel (PVD) | 355 |

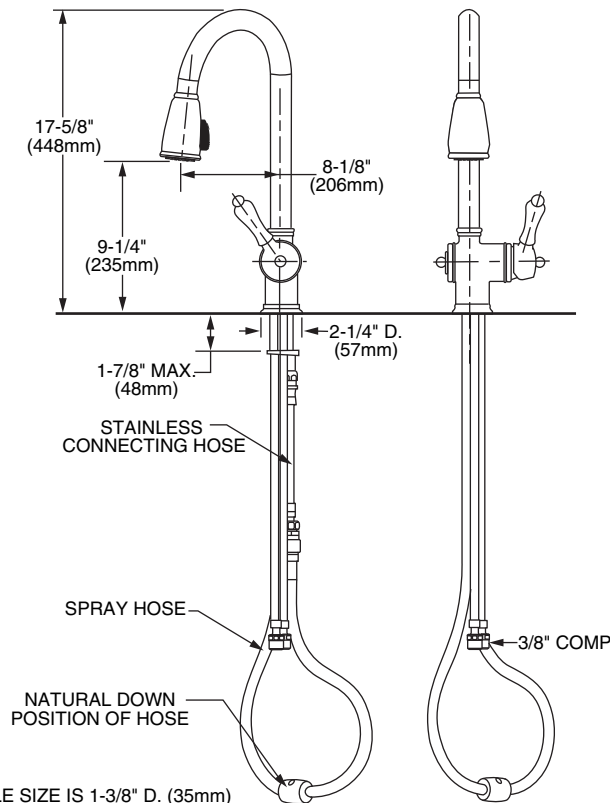

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CODES & STANDARDS

These products meet and exceed the following codes and standards:

ASME A112.18.1

CSA B125

NSF 61/Section 9



Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

