




Features:

- Cast brass spout and side valves
- Ceramic disc valve cartridge
- Flexible Hose Connections for 6"-12" installations
- Available with Cross or Lever Handles
- Includes 1-1/4" drain assembly
- Lead Free Faucet contains ≤ 0.25% total lead content by weighted volume
- Maximum Flow Rate: 1.5 GPM (5.7L/min)

Pictured: 888/003 Widespread Faucet with Cross Handles

	Handle Type	Product Number	
Widespread Faucet	Cross	888/003	
Widespread Faucet	Lever	888/803	E

Available Finishes:	Finish Code	
Polished Chrome	100	
Brushed Nickel	144	
Diamond (PVD)	167	

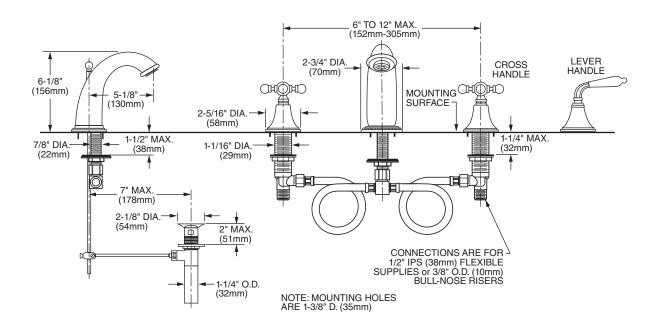

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



CODES & STANDARDS

These products meet and exceed the following codes and standards:

ASME A112.18.1 CSA B125 NSF 61/Section 9 & Annex G EPA WaterSense® High Efficiency Lavatory Faucet Specification



