


INCANDESCENT / LED 12V HYBRID PATH & SPREAD

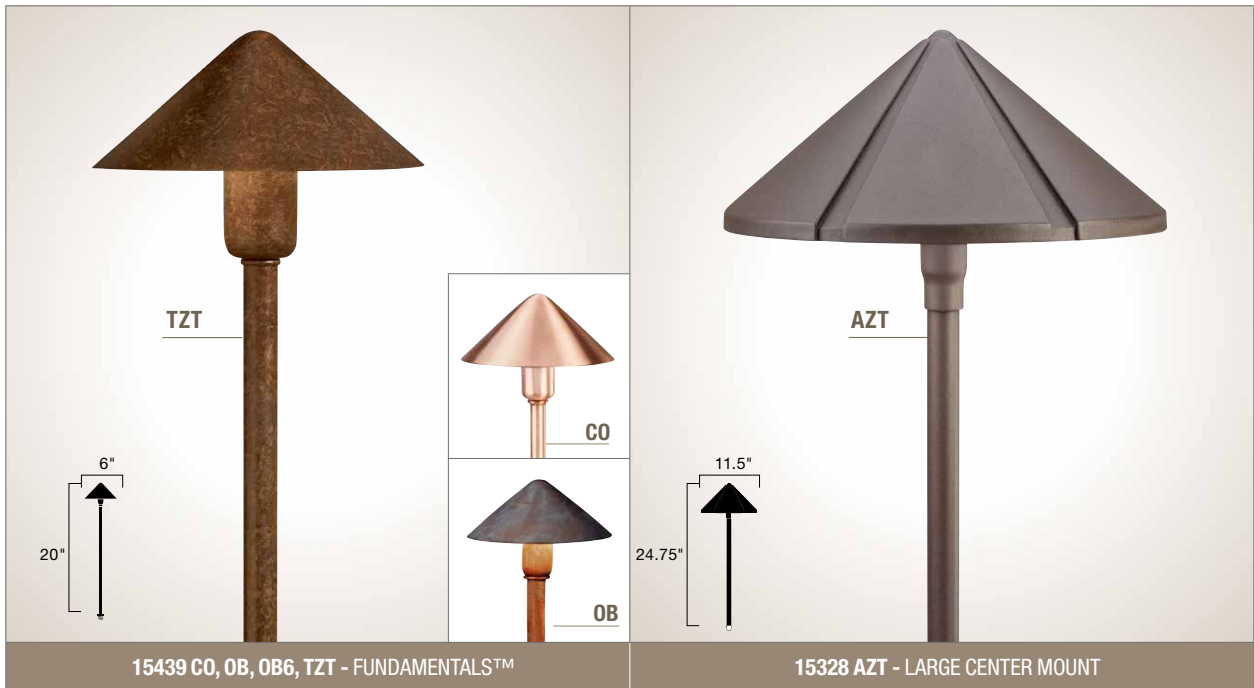

15439 CO, OB, OB6, TZT - FUNDAMENTALS™

15328 AZT - LARGE CENTER MOUNT

Description	Basic, uncomplicated design for versatility. Use along walkways or points of interest. Now with a heavier gauge shade.	Wide head for broad light spread to highlight beds and paths. Textured Architectural Bronze finish blends with landscape.
Ordering Guide & Finish	15439 CO - Polished Copper, Copper 15439 OB - Olde Brick®, Brass 15439 OB6 - Same as 15439 OB. Bulk packed in 6 (unbreakable master). 15439 TZT - Textured Tannery Bronze™, Brass	15328 AZT - Textured Architectural Bronze
Housing	Brass or Unfinished Copper. Copper will naturally patina over time.	Aluminum
Lamp Base	12V S8 wedge base socket	12V S8 wedge base socket
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)
Incandescent Lamp Options	18.5-W(VA) 3155K (15599 CLR)	18.5-W(VA) 3155K (15599 CLR)
LED Lamp Options	2W (18036-18038) see page 159 Compares up to 18.5W Krypton	2W (18036-18038) see page 159 Compares up to 18.5W Krypton
Wiring	35" of usable #18-2, SPT-1-W leads. Cable connector supplied	35" of usable #18-2, SPT-1-W leads. Cable connector supplied
Mounting Acces. Included	8" In-ground stake	8" In-ground stake and 18" stem
Optional Acces.	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket	15601 - Surface Mounting Flange 15607 - Surface Mounting Bracket
Integrated LED Options	15839 - on Page 11	NA
Photometric with Supplied Lamp	Distance from Light	0' 1' 2' 3' 4' 5' 6' 7' 8'
	Footcandles	13.4 4.55 1.65 .58 .13 - - - -
	Stem Height	1' 2' 3' 4' 5' 6' 7' 8' 9'
	12"	20.8 4.1 .27 - - - - -
18** (as supplied)	12.1 5.6 1.8 .67 - - - - -	
24"	8.3 5.8 2.2 .97 .48 .02 - - -	

Denotes fixture is compatible with incandescent or LED lamps.