


**Features**

- Brass construction
- Single-hole mounting
- Above-counter battery and valve for easy installation and maintenance
- 24" (61 cm) flexible supply hoses for easy installation
- 6-3/16" (15.7 cm) spout reach
- Stationary gooseneck spout
- Available with or without mixer
- Includes two AA batteries
- Less drain
- .5 gallons (1.9 L) per minute flow rate

**ELECTRONIC FAUCET  
K-13472  
ALSO K-13473**

ADA

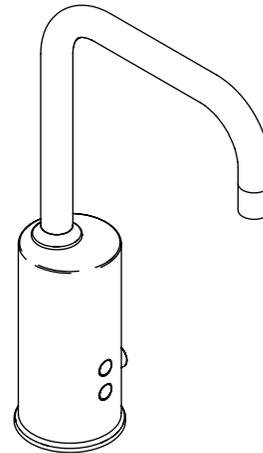

**Codes/Standards Applicable**

Specified model meets or exceeds the following at date of manufacture:

- ADA
- ASME A112.18.1/CSA B125.1
- ICC/ANSI A117.1
- Energy Policy Act of 1992
- All applicable US Federal and State material regulations
- UL 1951 (AC Model)

**Colors/Finishes**

- CP: Polished Chrome
- VS: Stainless Steel

**Accessories**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes
- NA: None applicable

**Specified Model**

Model	Description	Colors/Finishes		
K-13472	Electronic faucet – with mixer (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> VS	
K-13473	Electronic faucet – without mixer	<input type="checkbox"/> CP	<input type="checkbox"/> VS	
Optional Accessories				
K-7129-A	Grid drain	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____	
K-13601	Thermostatic mixing valve			<input type="checkbox"/> NA

**Product Specification**

The electronic faucet shall be of brass construction. Product shall have 0.5 gpm (1.9 lpm). Product shall feature a 6-3/16" (15.7 cm) spout reach, stationary gooseneck spout, and 24" (61 cm) flexible supply hoses for easy installation. Product shall feature an above-counter battery and valve for easy installation and maintenance. Product shall include two AA batteries. Product shall be for single-hole mounting. Product shall be available with our without mixer. Product shall be less drain. Faucet shall be Kohler Model K-\_\_\_\_-\_\_\_\_.

## Installation Notes


Install this product according to the installation guide.

A 1-1/4" (3.2 cm) minimum to 2-1/2" (6.4 cm) diameter maximum mounting hole is required.

The minimum distance between the back of the faucet spout and the wall must be 1-3/4" (4.4 cm). This will allow proper clearance for setscrew access.

The maximum distance between the lavatory basin edge to the base of the faucet spout must be 1-3/4" (4.4 cm).

The maximum height of the lip basin should be 3/4" (1.9 cm).

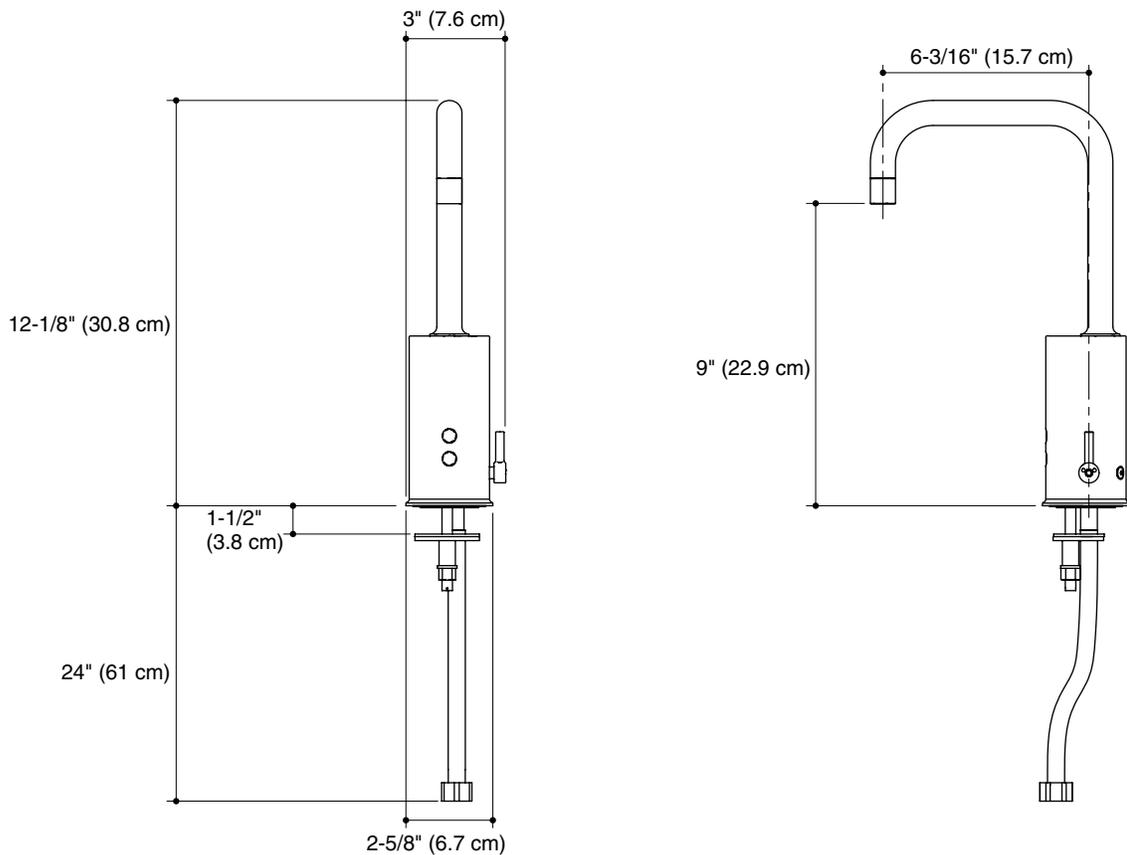

**Product Diagram**