


### WALL-MOUNT LAVATORY

# K-1722, K-1724, K-1728

ADA



### FEATURES

- 19-1/4"(48.9cm) x 17-1/4"(43.8cm)
- Vitreous china
- Ledge-back
- 8"(20.3cm) centers (K-1724), 4"(10.2cm) centers (K-1728) or single-hole (K-1722)
- With overflow
- ADA compliant
- With hanger
- Drilled for concealed arm carrier

### CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME/ANSI A112.19.2M
- CABO/ANSI A117.1
- IAPMO/UPC
- State of Massachusetts

### COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

#### Accessories:

- CP Polished Chrome
- Other Refer to Faucets Price Book for additional finishes

### SPECIFIED MODEL:

Model	Description	Colors/Finishes	
K-1724	8" (20.3cm) centers lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1728	4" (10.2cm) centers lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
K-1722	Single-hole lavatory	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____
Recommended Accessories			
K-8998	Trap	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

### PRODUCT SPECIFICATION:

The lavatory shall be 19-1/4" (48.9cm) in length, and 17-1/4" (43.8cm) in width. Lavatory shall be made of vitreous china. Lavatory shall be ledge-back with hanger. Lavatory shall have 8" (20.2cm) centers (K-1724), 4" (10.2cm) centers (K-1728), or single-hole (K-1722) drilling. Lavatory shall be drilled for concealed arm carrier. Lavatory shall have overflow. Lavatory shall be ADA compliant. Lavatory shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_.

## PRODUCT INFORMATION

ADA compliant.			
Fixture*:		basin area	water depth
Lavatory		14" (35.6cm) x 11" (27.9cm)	4-7/8" (12.4cm)
Drain hole	1-3/4" D. (4.4cm)		
* Approximate measurements for comparison only.			
Holes	<b>K-1724</b>	<b>K-1728</b>	<b>K-1722</b>
Spout	1-3/8" D. (3.5cm)	1-1/4" D. (3.2cm)	1-3/8" D. (3.5cm)
Faucet	1-3/8" D. (3.5cm)	1-1/4" D. (3.2cm)	
Soap dispenser			1-1/4" D. (3.2cm)
Included Components:			
Hanger	64839		


## INSTALLATION NOTES

Install this product according to the installation guide.


Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2M.

Concealed arm carrier required, **NOT** supplied by Kohler Co.  
Supplied hanger not used with concealed arm carrier.

### CONCEALED ARM HOLE LOCATIONS

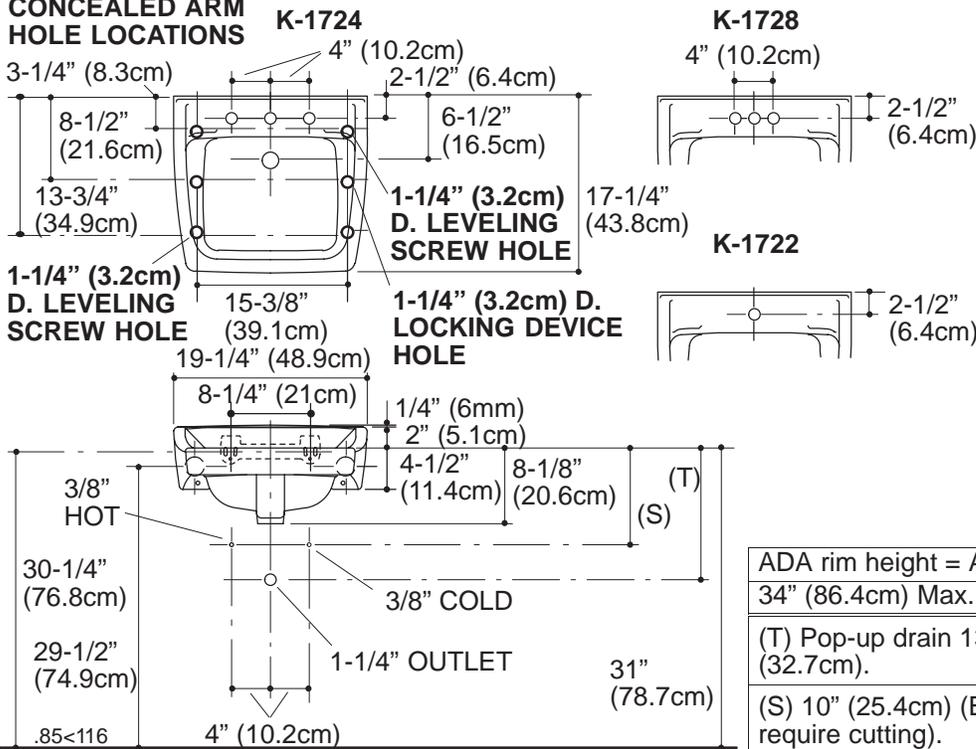

STANDARD INSTALLATION

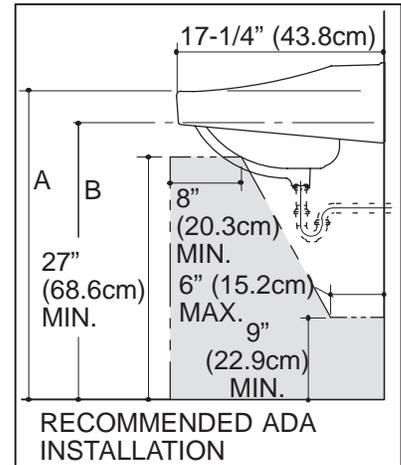

RECOMMENDED ADA INSTALLATION

ADA rim height = A	ADA arm carrier height = B
34" (86.4cm) Max.	33" (81.9cm) Max.
(T) Pop-up drain 13-3/4" (34.9cm), grid drain 12-7/8" (32.7cm).	
(S) 10" (25.4cm) (Based on 12" (30.5cm) riser which may require cutting).	

## PRODUCT DIAGRAM