

#### **Features**


- Metal construction
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit stop for added safety
- Lower flow aerator options are available (refer to the Kohler Price Book)
- Lever or loop handle
- Handspray through escutcheon
- Ground joint connections
- 2.2 gpm (8.3 lpm) flow rate
- Available with an 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- NSF 61
- Energy Policy Act of 1992 (EPACT)

## **Specified Model**

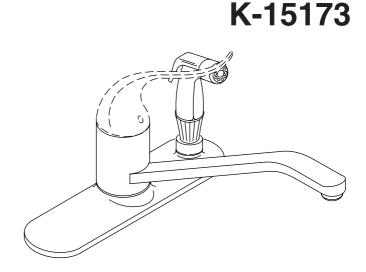

**CORALAIS**<sub>®</sub>

**KITCHEN SINK FAUCET** 

## **Colors/Finishes**

CP: Polished Chrome

Model	Description	ADA	ADA	
K-15173-P	Faucet with 8-1/2" (21.6 cm) swing spout and ground joints	CP		
K-15173-PT	Faucet with 10" (25.4 cm) swing spout and ground joints	CP		
K-15173-TL	Faucet with 10" (25.4 cm) swing spout and ground joints		□ CP	
Note: Faucet comes with a black handspray and polished chrome trim ring.				

**Optional Accessories on Page 2.** 

### **Product Specification**

Single-control kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained, ceramic disc valve, which allows both volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Valve shall feature a high-temperature limit stop. Faucet shall include 8-1/2" (21.6 cm) or 10" (25.4 cm) swing spout, lever or loop handle, and black handspray through the escutcheon, and ground joint connections. Faucet shall be rated at 2.2 gallons (8.3 L) per minute. Faucet shall have lower flow aerator options. Faucet shall be Kohler Model K-15173-\_\_\_\_\_-CP.


# CORALAIS®

## **Technical Information**

Optional Accessories			2
K-15179-A	12" (30.5 cm) swing spout and aerator	CP	

### **Installation Notes**

Install this product according to the installation guide.

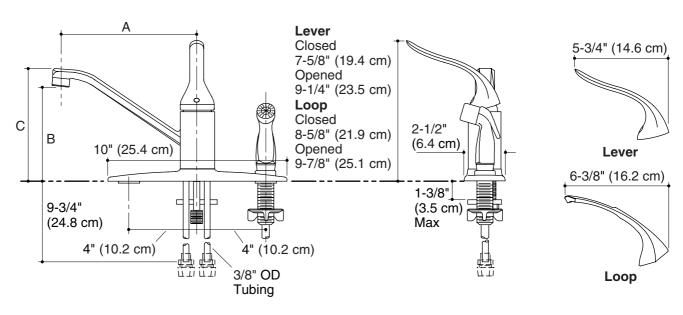

	А	В	С
K-15173, K-15173-P	8-1/2" (21.6 cm)	5" (12.7 cm)	6-1/8" (15.6 cm)
K-15173-PT, K-15173-TL	10" (25.4 cm)	5-3/4" (14.6 cm)	6-7/8" (17.5 cm)

## **Product Diagram**



