

**KITCHEN SINK FAUCET
K-158**

ADA


Features

- Brass construction
- Brass valve bodies
- Quarter-turn washerless ceramic disc valves
- 2.2 gpm (8.3 lpm) flow rate
- Handspray
- Flexible connections for easy installation
- For 8" (20.3 cm) centers
- Available with six-prong or lever handles
- Lever handles are ADA compliant
- 8-5/8" (21.9 cm) swing spout

Codes/Standards Applicable

Specified model meets or exceeds the following:

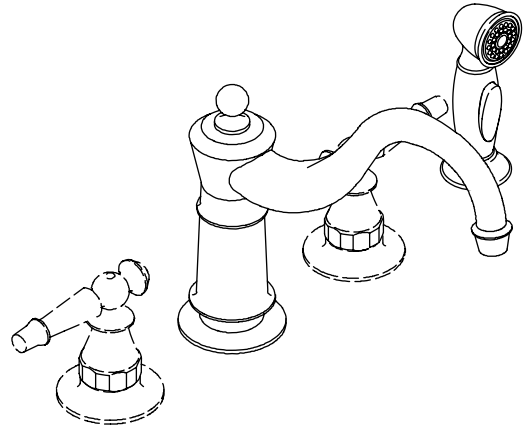


- ASME A112.18.1/CSA B125.1
- ASSE 1014
- NSF 61
- Energy Policy Act of 1992 (EPACT)
- ADA



Colors/Finishes

- CP: Polished Chrome
- BN: Brushed Nickel
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description		
K-158-3	Kitchen sink faucet with six-prong handles	<input type="checkbox"/> CP <input type="checkbox"/> BN	
K-158-4	Kitchen sink faucet with lever handles (shown)		<input type="checkbox"/> CP <input type="checkbox"/> BN
Optional Accessories			
K-9637	Small lever inserts, pair	<input type="checkbox"/> CP <input type="checkbox"/> BN	
K-9657	Small lever inserts, pair	<input type="checkbox"/> Other	


Product Specification

The two-handle kitchen sink faucet shall be of brass construction. Faucet shall feature brass valve bodies. Faucet shall feature quarter-turn washerless ceramic disc valves, assuring positive handle stop positioning. Faucet shall have a flow rate of 2.2 gallons (8.3 L) per minute. Faucet shall feature 8" (20.3 cm) centers, 8-5/8" (21.9 cm) swing spout, six-prong handles (-3) or lever handles (-4), handspray, and flexible connections for easy installation. Faucet shall feature ADA compliant lever handles. Faucet shall be Kohler Model K-158-____-____.

ANTIQUETM

Installation Notes

Install this faucet following the installation instructions provided.

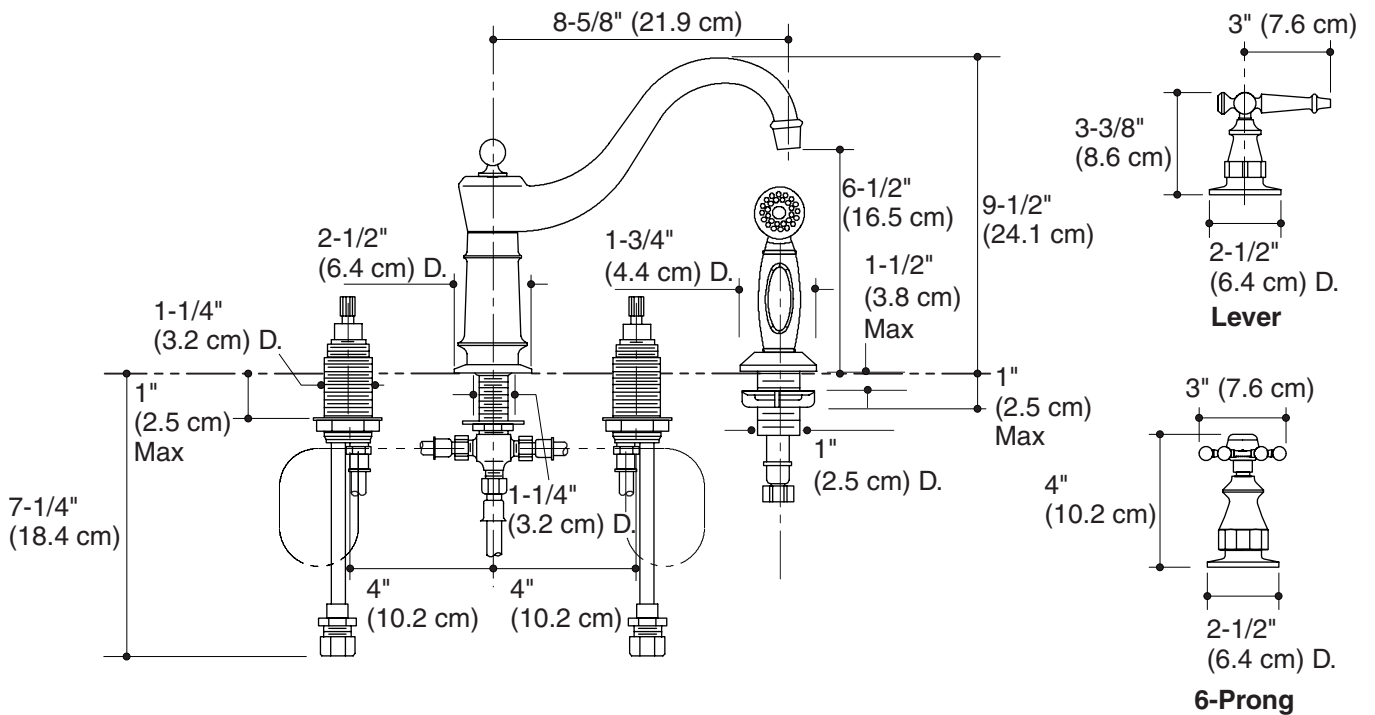

Product Diagram