KOHLER.


FEATURES

- 1-1/2" rear spud
- Vitreous china
- 12-3/8" x 11-3/8" water area
- Elongated bowl
- Wall-mount
- 1.6 gpf
- ADA compliant when installed at required height of 17"-19" from floor to top of seat
- With bedpan lugs (-L)

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ADA
- ASME/ANSI A112.19.2M
- ASME/ANSI A112.19.6M
- CABO/ANSI A117.1
- Energy Policy Act of 1992 (EPACT)
- IAPMO/UPC
- Canadian Standards Association (CSA)
- States of Massachusetts, New York, & Texas
- Cities of Los Angeles, CA



COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- 0 White
- Other Refer to Fixtures Price Book for additional colors

SPECIFIED MODEL:

Model	Description	Color	Colors/Finishes	
K-4329	Elongated bowl toilet	□0 White	□Other	
K-4329-L	Elongated bowl toilet with bedpan lugs	□0 White	□Other	
	•			

Recommended Accessories				
K-4670-C	Lustra [™] open front seat	□0 White	□Other	
K-4670-CA	Lustra [™] open front seat (with anti-microbial agent)	□0 White		

PRODUCT SPECIFICATION:

The elongated bowl shall be wall-mount with a 1-1/2" rear spud. Bowl shall be made of vitreous china. Bowl shall have 12-3/8" x 11-3/8" water area. Bowl shall be 1.6 gpf. Bowl shall be ADA compliant when installed at required height of 17"-19" from floor to top of seat. Bowl shall have bedpan lugs (-L). Bowl shall be Kohler Model K-4329-_____-

K-4329

BOWL


KINGSTON[™]

ADA

KINGSTON[™]

PRODUCT INFORMATION

ADA compliant.				
Fixture:				
Configuration	Rear spud,			
	elongated			
Gallons per flush	1.6 gallons*			
Spud size	1-1/2"			
Passageway	2-1/4"			
Water area	12-3/8" x 11-3/8"			
Water depth from rim	5-1/4"			
Seat post hole centers	5-1/2"			
* Designed to flush with 1.6 gallons of water when installed with a 1.6 gpf valve.				
Included Components:				
Spud	18357			
Flush valve requirements: Refer to manufacturer and local codes.				

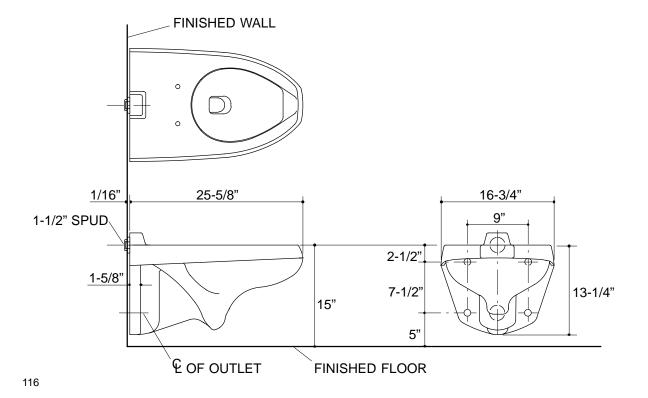

PRODUCT DIAGRAM

