


Features

- Metal construction
- 360° swing spout with integral pull-out spray and hose
- Three function sprayhead with spray, aerated stream, and pause settings
- Promotion™ technology with nylon hose and ball joint for easy operation
- One-piece, self-contained ceramic disc valve allows both volume and temperature control
- Temperature memory allows faucet to be turned on and off at any temperature setting
- High-temperature limit setting for added safety
- Integral backflow protection
- ADA compliant lever handle
- Lower flow aerator options are available (refer to the Kohler Price Book)
- 2.2 gallons (8.3 L) per minute maximum flow rate
- Contemporary styling


PULL-OUT KITCHEN SINK FAUCET

K-6331
ALSO K-6332

ADA



K-6331



K-6332

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- IAPMO/cUPC
- ASME A112.18.1/CSA B125.1
- NSF 61
- Energy Policy Act of 1992

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model:

Model	Description	Colors/Finishes
K-6331	Primary pull-out kitchen sink faucet – 9” (22.9 cm) spout reach	<input type="checkbox"/> CP <input type="checkbox"/> Other _____
K-6332	Secondary/prep pull-out kitchen sink faucet – 8” (20.3 cm) spout reach	<input type="checkbox"/> CP <input type="checkbox"/> Other _____


Product Specification

The contemporary pull-out kitchen sink faucet shall be of metal construction. Valve shall be a one-piece, self-contained ceramic disc valve, allowing volume and temperature control. Valve shall feature temperature memory, allowing the faucet to be turned on and off at any temperature setting. Product shall feature a high-temperature limit stop for added safety. Product shall feature a 360° swing spout with integral pullout spray and hose. Product shall feature a three function sprayhead with spray, aerated stream, and pause settings. Product shall include integral backflow protection, ADA compliant lever handle, and 2.2 gallon (8.3 L) per minute flow rate. Product shall feature Promotion technology with nylon hose and ball joint for easy operation. Product shall be available with lower flow aerator options (see Kohler Price Book). Kitchen faucet shall be Kohler Model K-_____-_____.

EVOKE™

Installation Notes

Install this product according to the installation guide.

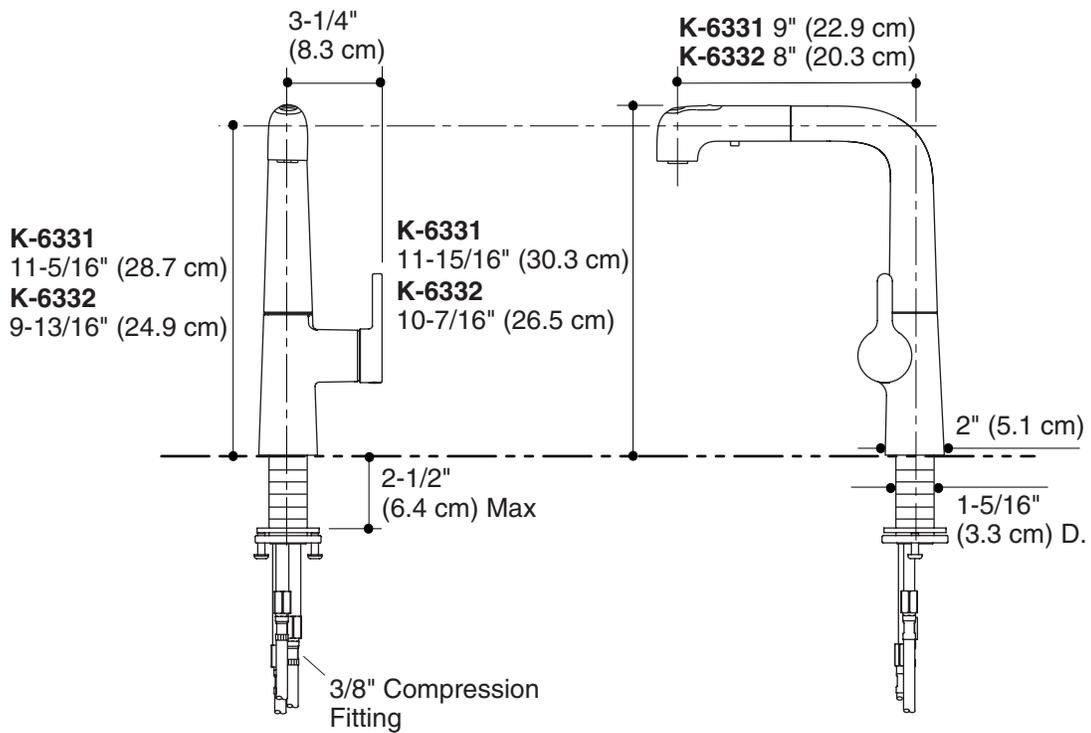

Product Diagram